




SUPPORTS CAN BE BOLTED OR PLUG WELDED TO UNDERSIDE OF MESH SEE NOTE #2

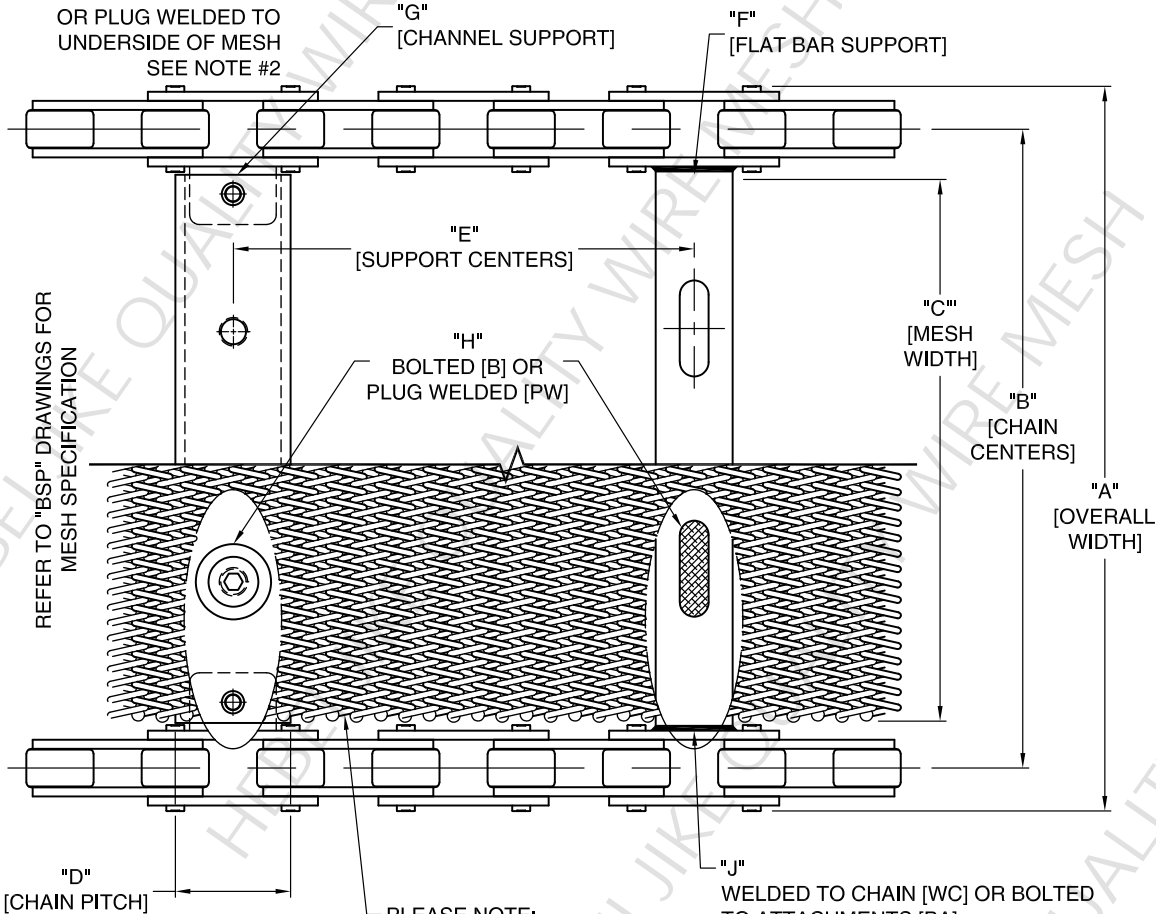


REFER TO "BSP" DRAWINGS FOR MESH SPECIFICATION

PLEASE NOTE: MESH AND CHAIN ARE REPRESENTATIONAL

"J" WELDED TO CHAIN [WC] OR BOLTED TO ATTACHMENTS [BA] (SPECIFY ATTACHMENT IN CHART)



SPIRAL ENDS TRAIL, "LIKE FISH SCALES"



OVERSIZE ROLLER




STANDARD ROLLER

ACCOMPANYING DRAWINGS BSP-001, BSP-005 & PLT-001

**NOTICE:**

THIS DRAWING IS THE PROPERTY OF THE WIRE MESH BELT COMPANY AND MAY NOT BE COPIED OR REPRODUCED IN ANY FORM, OR USED FOR MANUFACTURING PURPOSES OF ANY KIND WITHOUT THE EXPRESSED WRITTEN CONSENT OF THE WIRE MESH BELT COMPANY.



ALL DIMENSIONS ARE INCHES UNLESS OTHERWISE SPECIFIED

CUSTOMER INFORMATION

P.O. #

W.O.#

**TOLERANCE UNLESS OTHERWISE SPECIFIED**

|            |        |                   |
|------------|--------|-------------------|
| DECIMAL .X | ±.03   | FRACTIONAL ± 1/16 |
| .XX        | ±.015  | ANGULAR ± 1/2°    |
| .XXX       | ±.005  |                   |
| .XXXX      | ±.0005 |                   |

|    |      |          |    |
|----|------|----------|----|
| NO | DATE | REVISION | BY |
|----|------|----------|----|

**BELT SPECIFICATION**

| VARIABLES   | DATA       | MATERIAL |
|---|------------|----------|
| "A"   |            |          |
| "B"   |            |          |
| "C"   |            |          |
| "D"   |            |          |
| "E"   |            |          |
| "F" (SIZE)  |            |          |
| "G" (SIZE)  |            |          |
| "H"   | B or PW    |          |
| "J"   | WC or BA   |          |
| CHAIN NUMBER  |            |          |
| ROLLER SIZE   | STD or OVR |          |
| MESH SPEC.  |            |          |
| NOTES: (IE. SIDE PLATES, FLIGHTS, ATTACHMENTS ETC.) |            |          |
| PLEASE CIRCLE CRITICAL DIMENSION                    |            |          |
| "A"   | "B"        | "C"      |

**NOTES:**

- THIS DRAWING IS INTENDED SOLELY FOR LAYOUT PURPOSES. IT IS THE RESPONSIBILITY OF THE CUSTOMER TO RELAY ANY IMPORTANT INFORMATION REGARDING ANY AND ALL DESIGN FEATURES OF DESIRED BELT.
- PLEASE NOTE THAT WHEN SUPPORTS ARE TO BE BOLTED TO MESH, A MINIMAL AMOUNT OF PLUG WELDING IS REQUIRED TO SECURELY FASTEN THE MESH.


[www.qualitywiremesh.com](http://www.qualitywiremesh.com)  
[janeliu@qualitywiremesh.com](mailto:janeliu@qualitywiremesh.com)  
 whatsapp/WeChat : +86-15831931141

|  |          |         |
|--|----------|---------|
| TITLE  | REV      | SCALE   |
| EXTENDED PITCH CHAIN DRIVEN FRAMED BELT LAYOUT | 0        | N.T.S.  |
| DATE   | 07/07/03 | DRAWING |
| DRAWN BY                                       | MP       | BL-002  |




|    |      |          |    |
|----|------|----------|----|
| NO | DATE | REVISION | BY |
|----|------|----------|----|

SUPPORTS CAN BE BOLTED OR PLUG WELDED TO UNDERSIDE OF MESH SEE NOTE #2

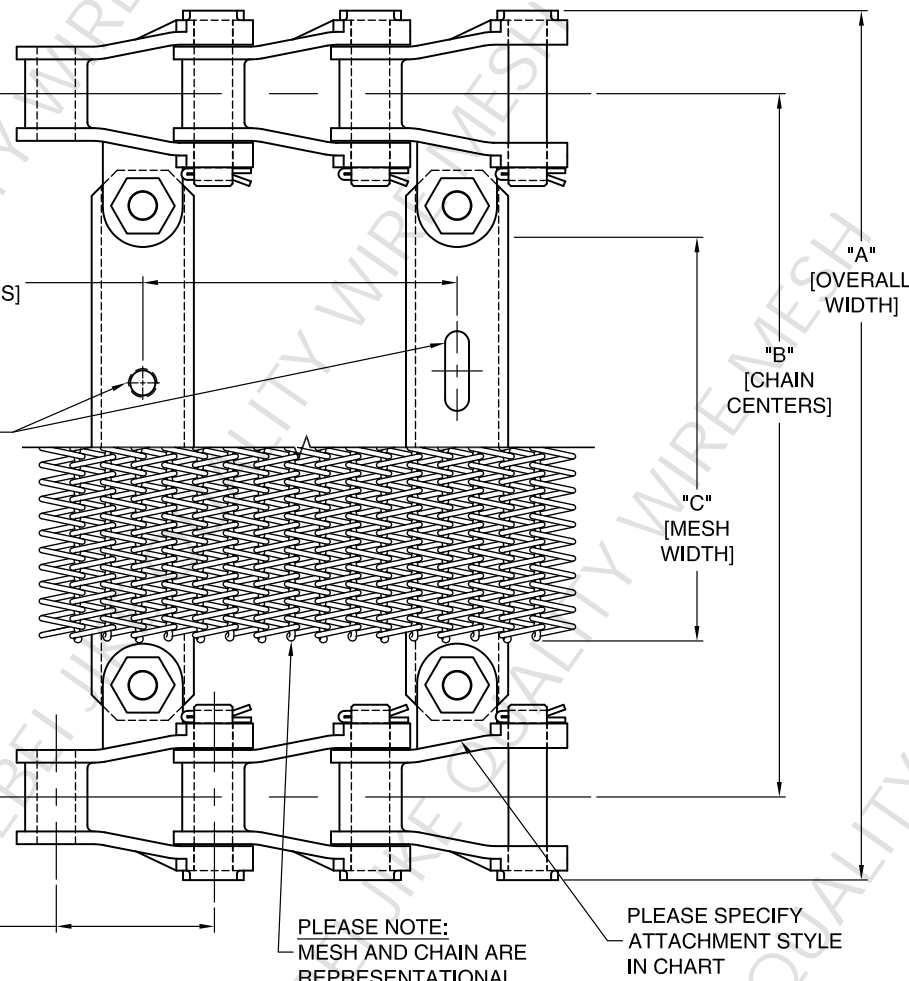

REFER TO "BSP" DRAWINGS FOR MESH SPECIFICATION

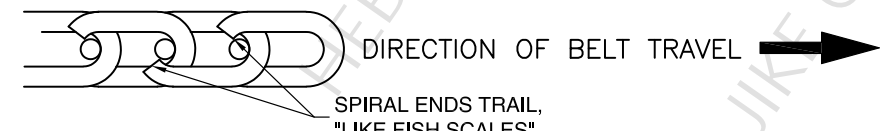


### BELT SPECIFICATION

| VARIABLES   | DATA    | MATERIAL |
|---|---------|----------|
| "A"   |         |          |
| "B"   |         |          |
| "C"   |         |          |
| "D"   |         |          |
| "E"   |         |          |
| "F"   | B or PW |          |
| CHAIN NUMBER  |         |          |
| MESH SPEC.  |         |          |
| NOTES: (IE. SIDE PLATES, FLIGHTS, ATTACHMENTS ETC.) |         |          |
|   |         |          |
|   |         |          |
|   |         |          |
|   |         |          |
| PLEASE CIRCLE CRITICAL DIMENSION                    |         |          |
| "A"   | "B"     | "C"      |

**NOTES:**


1. THIS DRAWING IS INTENDED SOLELY FOR LAYOUT PURPOSES. IT IS THE RESPONSIBILITY OF THE CUSTOMER TO RELAY ANY IMPORTANT INFORMATION REGARDING ANY AND ALL DESIGN FEATURES OF DESIRED BELT.
2. PLEASE NOTE THAT WHEN SUPPORTS ARE TO BE BOLTED TO MESH, A MINIMAL AMOUNT OF PLUG WELDING IS REQUIRED TO SECURELY FASTEN THE MESH.



SELECT CHAIN DIRECTION

ACCOMPANYING DRAWINGS BSP-001, BSP-005 & PLT-001


**NOTICE:**  
THIS DRAWING IS THE PROPERTY OF THE WIRE MESH BELT COMPANY AND MAY NOT BE COPIED OR REPRODUCED IN ANY FORM, OR USED FOR MANUFACTURING PURPOSES OF ANY KIND WITHOUT THE EXPRESSED WRITTEN CONSENT OF THE WIRE MESH BELT COMPANY.





ALL DIMENSIONS ARE INCHES UNLESS OTHERWISE SPECIFIED

|   |        |
|---|--------|
| CUSTOMER INFORMATION                        |        |
| P.O. #                                      |        |
| W.O.#                                       |        |
| <b>TOLERANCE UNLESS OTHERWISE SPECIFIED</b> |        |
| DECIMAL .X                                  | ±.03   |
| .XX   | ±.015  |
| .XXX  | ±.005  |
| .XXXX                                       | ±.0005 |
| FRACTIONAL ± 1/16                           |        |
| ANGULAR ± 1/2°                              |        |

|   |          |         |
|---|----------|---------|
| <a href="http://www.qualitywiremesh.com">www.qualitywiremesh.com</a><br><a href="mailto:janeliu@qualitywiremesh.com">janeliu@qualitywiremesh.com</a><br>whatsapp/WeChat : +86-15831931141 |          |         |
| TITLE   | REV      | SCALE   |
| BELT LAYOUT FOR PINTLE CHAIN w/ "A" ATTACHMENTS   | 0        | N.T.S.  |
| DATE  | 07/07/03 | DRAWING |
| DRAWN BY  | MP       | BL-004  |

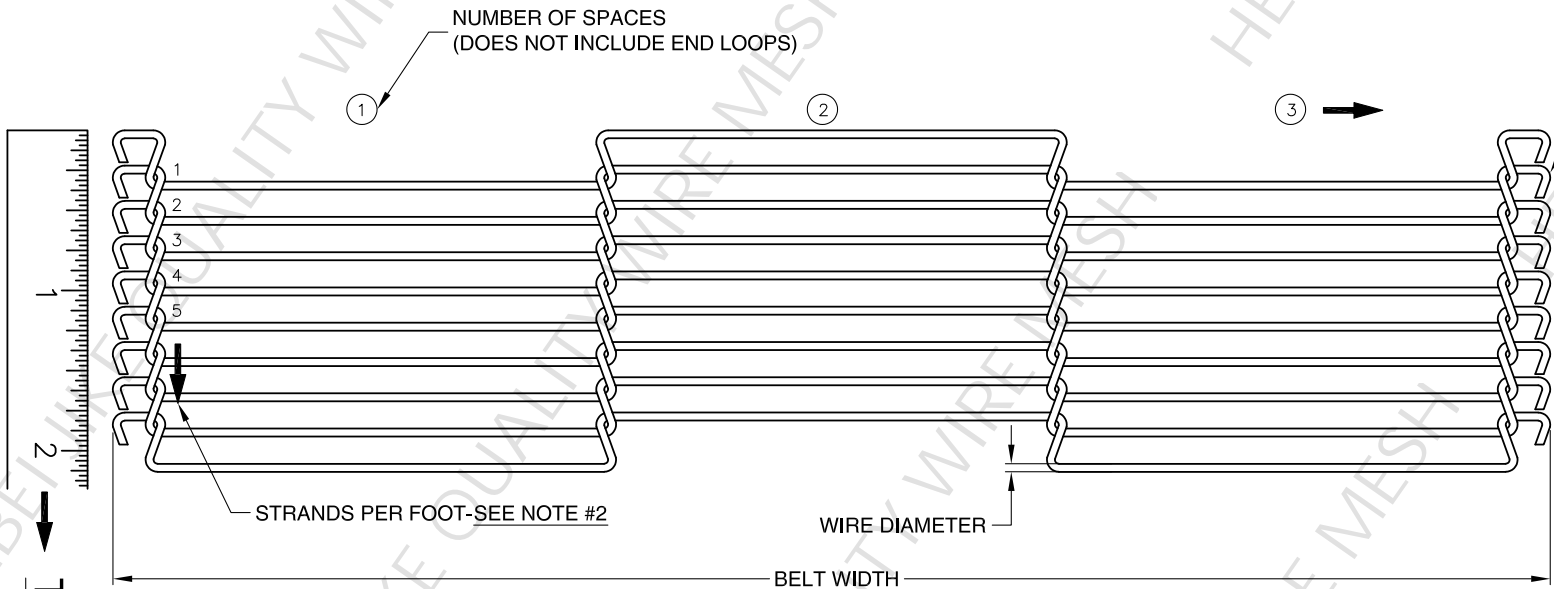

| STANDARD BELT SPECIFICATIONS |  |
|------------------------------|--|
| STRANDS/FT x WIRE DIAMETER   |  |
| <b>IMPERIAL SIZES</b>        |  |
| 72 x .035                    |  |
| 72 x .050                    |  |
| 54 x .035                    |  |
| 48 x .050                    |  |
| 42 x .050                    |  |
| 42 x .062                    |  |
| 32 x .082                    |  |
| 27 x .050                    |  |
| 24 x .072                    |  |
| 24 x .092                    |  |
| 15 x .092                    |  |
| <b>METRIC SIZES</b>          |  |
| 51 x .050                    |  |
| 34 x .062                    |  |
| 25 x .072                    |  |

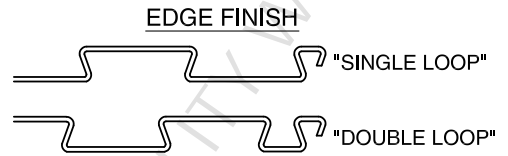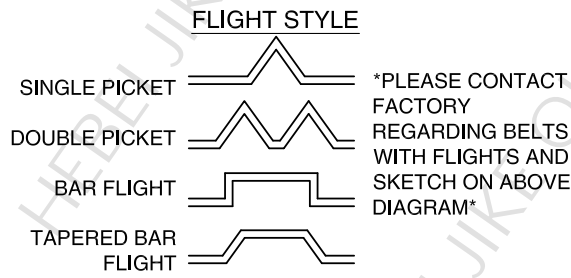


| BELT SPECIFICATION |  |
|--------------------|--|
| BELT NUMBER        |  |
| BELT LENGTH        |  |
| STRANDS / FT       |  |
| WIRE DIAMETER      |  |
| BELT WIDTH         |  |
| # OF SPACES        |  |
| EDGE FINISH        |  |
| MATERIAL           |  |
| NOTES:             |  |
|                    |  |
|                    |  |
|                    |  |

**NOTES:**

1. THIS DRAWING IS INTENDED SOLELY FOR LAYOUT PURPOSES. IT IS THE RESPONSIBILITY OF THE CUSTOMER TO RELAY ANY IMPORTANT INFORMATION REGARDING ANY AND ALL DESIGN FEATURES OF DESIRED BELT.
2. WHEN COUNTING THE NUMBER OF STRANDS IN (1)FOOT OF BELTING, BE SURE THAT THE BELT IS UNDER TENSION IN ORDER TO GATHER AN ACCURATE READING.
3. PLEASE CHECK THAT ALL SPACES ARE OF EQUAL SIZE. IF SIZES ARE DIFFERENT PLEASE SPECIFY IN THE "BELT SPECIFICATION CHART".

|   |  |   |          |                 |
|---|--|---|----------|-----------------|
| <b>NOTICE:</b><br>THIS DRAWING IS THE PROPERTY OF THE WIRE MESH BELT COMPANY AND MAY NOT BE COPIED OR REPRODUCED IN ANY FORM, OR USED FOR MANUFACTURING PURPOSES OF ANY KIND WITHOUT THE EXPRESSED WRITTEN CONSENT OF THE WIRE MESH BELT COMPANY. | CUSTOMER INFORMATION   | <a href="http://www.qualitywiremesh.com">www.qualitywiremesh.com</a><br><a href="mailto:janeliu@qualitywiremesh.com">janeliu@qualitywiremesh.com</a><br><a href="https://www.whatsapp.com/channel/0029915831931141">whatsapp/WeChat : +86-15831931141</a> |          |                 |
|   | P.O. #   |   |          |                 |
| <br>ALL DIMENSIONS ARE INCHES UNLESS OTHERWISE SPECIFIED  | W.O.#  | TITLE<br>FLAT FLEX BELTING  |          |                 |
|   | <b>TOLERANCE UNLESS OTHERWISE SPECIFIED</b><br>DECIMAL .X ±.03<br>.XX ±.015<br>.XXX ±.005<br>.XXXX ±.0005<br>FRACTIONAL ± 1/16<br>ANGULAR ± 1/2° |   | REV<br>0 | SCALE<br>N.T.S. |
| DATE  |  | 11/03/03  | DRAWING  |                 |
| DRAWN BY  |  | MP  | FFX-001  |                 |

|    |      |          |    |
|----|------|----------|----|
| NO | DATE | REVISION | BY |
|----|------|----------|----|

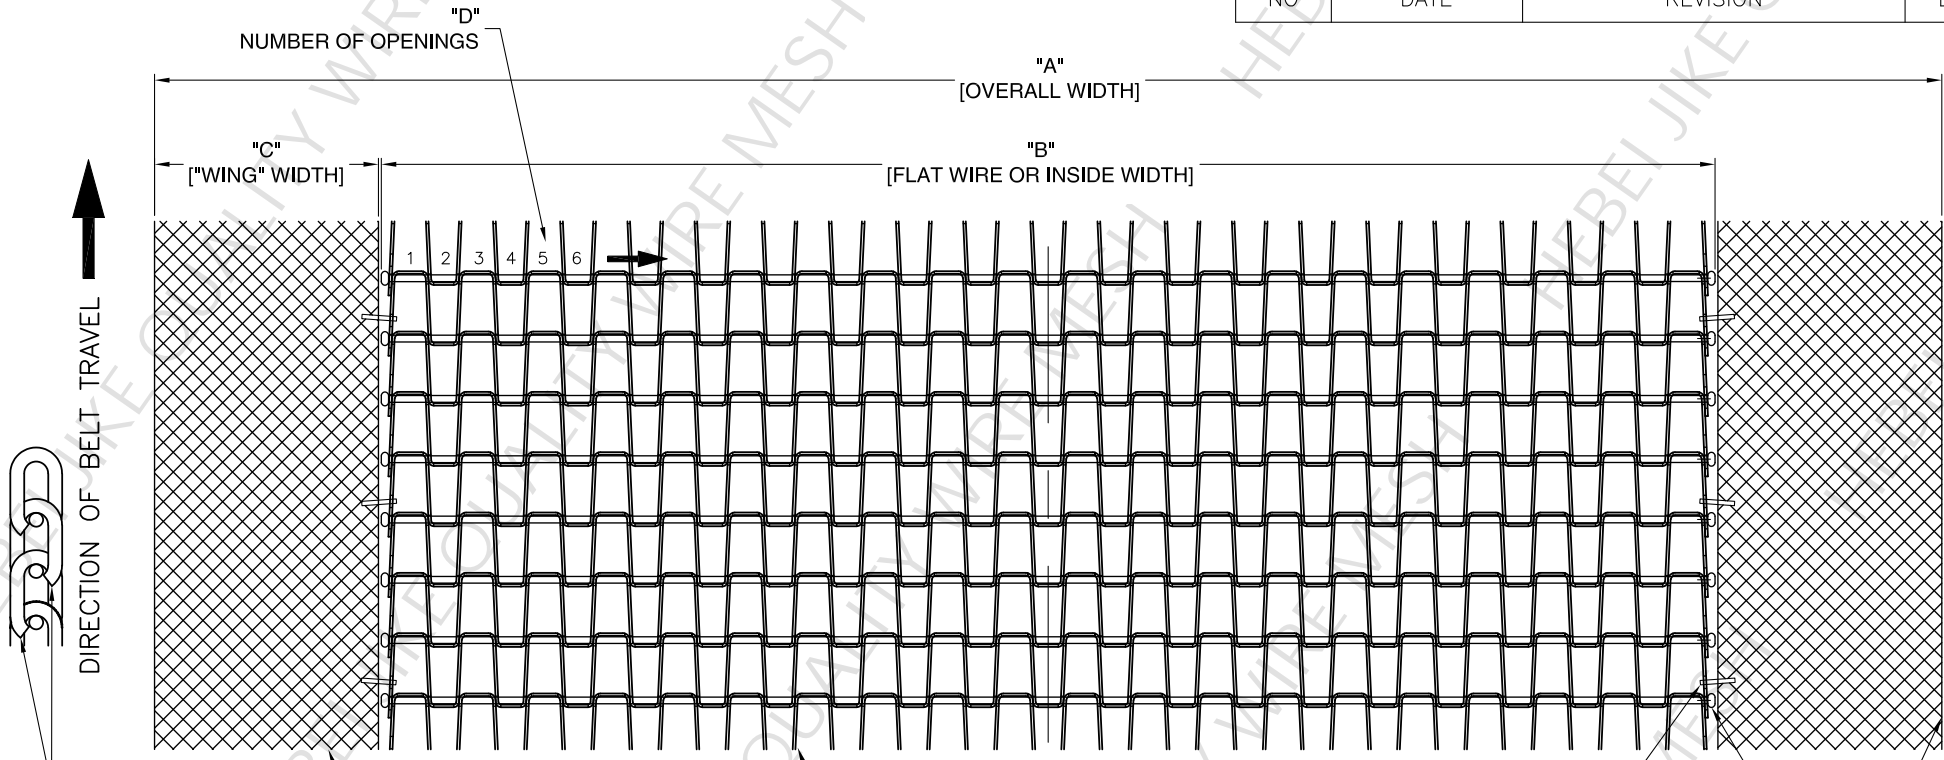

SPIRAL ENDS TRAIL, "LIKE FISH SCALES"

MESH IS REPRESENTATIONAL. PLEASE REFER TO BSP-001 FOR WIRE MESH SPECIFICATIONS

PLEASE REFER TO BSP-002 FOR FLAT WIRE SPECIFICATIONS

"BULL RINGS" EVERY 3RD PITCH OF FLAT WIRE BELTING. (TYP BOTH SIDES)

WELDED CONNECTING RODS AND WELDED MESH EDGES

### BELT SPECIFICATION

| VARIABLES                        | DATA | MATERIAL |
|----------------------------------|------|----------|
| "A"                              |      |          |
| "B"                              |      |          |
| "C"                              |      |          |
| "D"                              |      |          |
| MESH SPEC                        |      |          |
| FLAT WIRE DUTY                   |      |          |
| NOTES:                           |      |          |
|                                  |      |          |
|                                  |      |          |
|                                  |      |          |
| PLEASE CIRCLE CRITICAL DIMENSION |      |          |
| "A"                              | "B"  | "C"      |

**NOTES:**

- THIS DRAWING IS INTENDED SOLELY FOR LAYOUT PURPOSES. IT IS THE RESPONSIBILITY OF THE CUSTOMER TO RELAY ANY IMPORTANT INFORMATION REGARDING ANY AND ALL DESIGN FEATURES OF DESIRED BELT.
- EXAMPLE OF FLAT BELT WIRE SPECIFICATION IS 1/2" x 1", WHERE 1/2" IS LATERAL PITCH AND 1" IS LONGITUDINAL PITCH. PLEASE REFER TO BSP-002.

**NOTICE:**  
THIS DRAWING IS THE PROPERTY OF THE WIRE MESH BELT COMPANY AND MAY NOT BE COPIED OR REPRODUCED IN ANY FORM, OR USED FOR MANUFACTURING PURPOSES OF ANY KIND WITHOUT THE EXPRESSED WRITTEN CONSENT OF THE WIRE MESH BELT COMPANY.

ALL DIMENSIONS ARE INCHES UNLESS OTHERWISE SPECIFIED

|                                      |                   |
|--------------------------------------|-------------------|
| CUSTOMER INFORMATION                 |                   |
| P.O. #                               |                   |
| W.O.#                                |                   |
| TOLERANCE UNLESS OTHERWISE SPECIFIED |                   |
| DECIMAL .X ±.03                      | FRACTIONAL ± 1/16 |
| .XX ±.015                            |                   |
| .XXX ±.005                           | ANGULAR ± 1/2°    |
| .XXXX ±.0005                         |                   |


|   |          |            |
|---|----------|------------|
| <a href="http://www.qualitywiremesh.com">www.qualitywiremesh.com</a><br><a href="mailto:janeliu@qualitywiremesh.com">janeliu@qualitywiremesh.com</a><br>whatsapp/WeChat : +86-15831931141 |          |            |
| TITLE   | REV      | SCALE      |
| FILTER BELT w/ WIRE MESH WINGS  | 0        | N.T.S.     |
| DATE  | 09/29/03 | DRAWING    |
| DRAWN BY  | MP       | FILTER-001 |

www.qualitywiremesh.com  
 janeliu@qualitywiremesh.com  
 whatsapp/WeChat : +86-15831931141


|                  |  |                                  |  |
|------------------|--|----------------------------------|--|
| COMPANY NAME:    |  | ATTENTION:                       |  |
| COMPANY ADDRESS: |  | SPECIAL REQUIREMENTS:            |  |
| EMAIL ADDRESS:   |  |                                  |  |
| TEL NO.:         |  | (ex. PIN ROLL OR SPROCKET DRIVE) |  |
| FAX NO.:         |  |                                  |  |


| BELT SPECIFICATION |  |
|--------------------|--|
| BELT WIDTH         |  |
| NO. OF OPENINGS    |  |
| BELT LENGTH        |  |
| BELT MATERIAL      |  |
| EDGE FINISH        |  |
| BELT DUTY          |  |
| LATERAL PITCH      |  |
| LONGITUDINAL PITCH |  |
| OPENING WIDTH      |  |

**BELT DUTY COMPARISON**

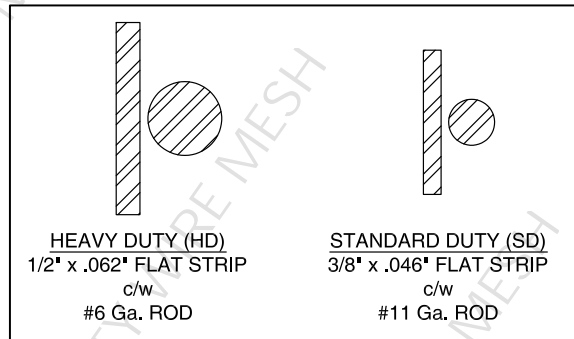


**FLAT WIRE & CROSS ROD PITCH MEASURING**

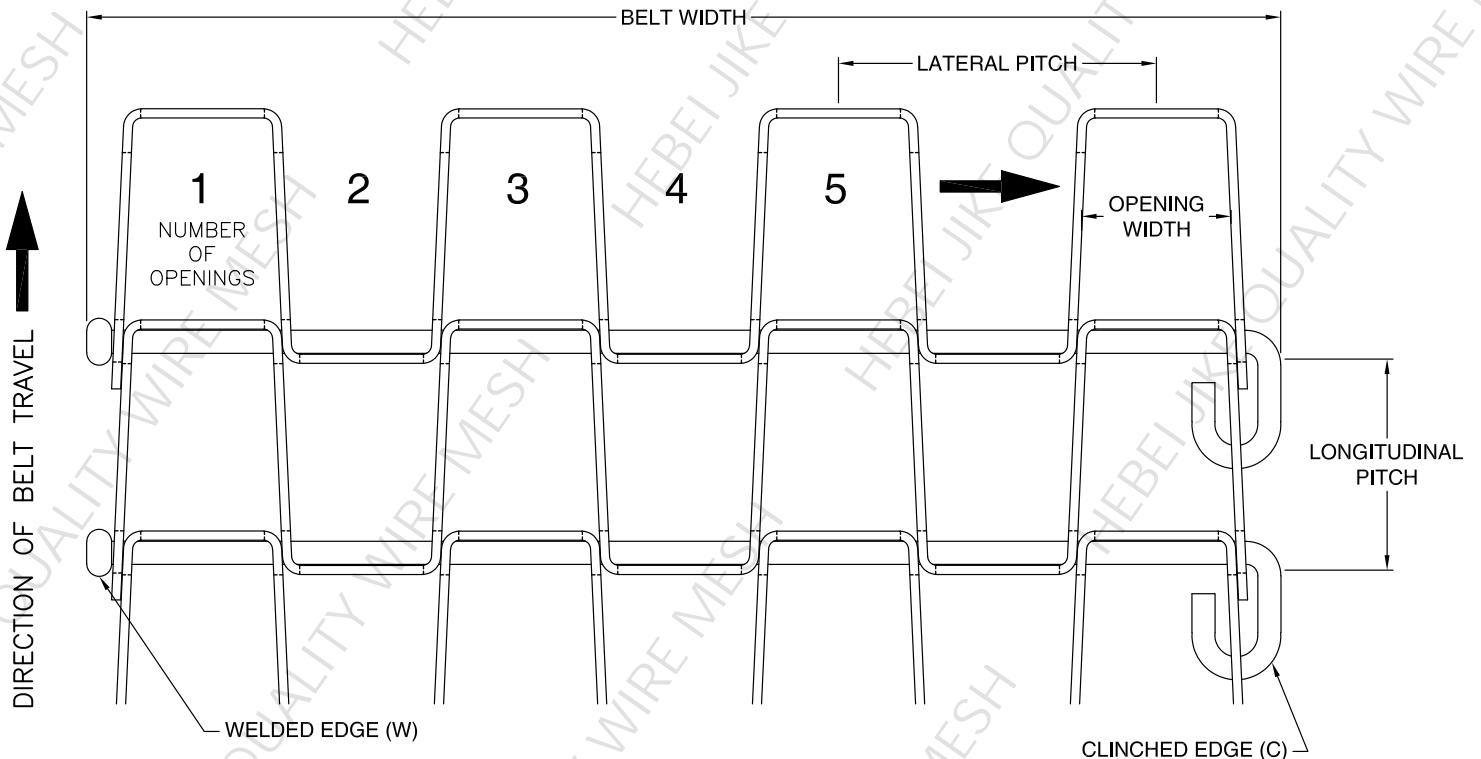

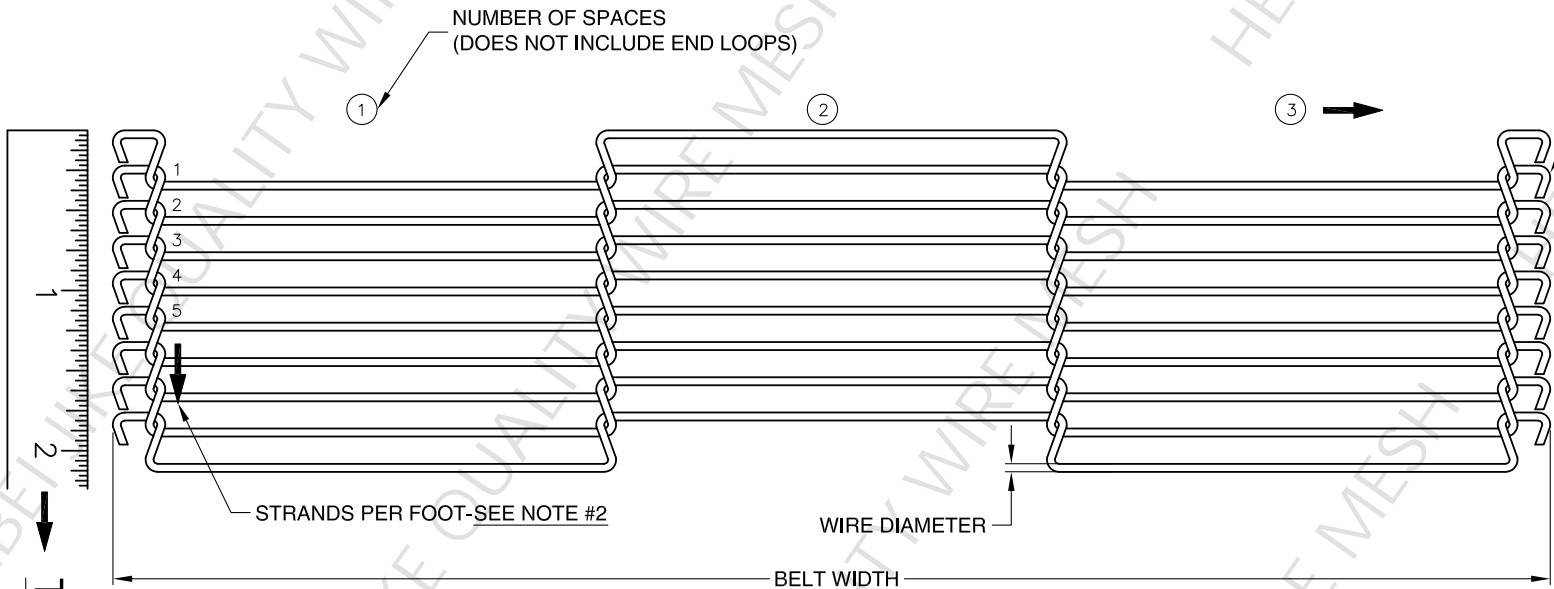


| STANDARD BELT SPECIFICATIONS |  |
|------------------------------|--|
| STRANDS/FT x WIRE DIAMETER   |  |
| <b>IMPERIAL SIZES</b>        |  |
| 72 x .035                    |  |
| 72 x .050                    |  |
| 54 x .035                    |  |
| 48 x .050                    |  |
| 42 x .050                    |  |
| 42 x .062                    |  |
| 32 x .082                    |  |
| 27 x .050                    |  |
| 24 x .072                    |  |
| 24 x .092                    |  |
| 15 x .092                    |  |
| <b>METRIC SIZES</b>          |  |
| 51 x .050                    |  |
| 34 x .062                    |  |
| 25 x .072                    |  |

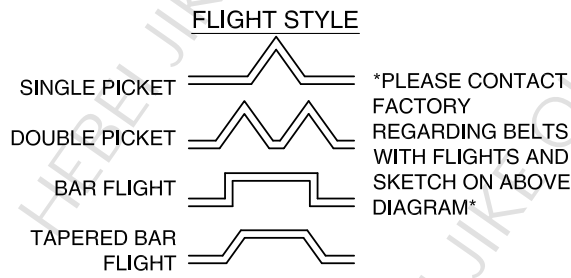

| BELT SPECIFICATION |  |
|--------------------|--|
| BELT NUMBER        |  |
| BELT LENGTH        |  |
| STRANDS / FT       |  |
| WIRE DIAMETER      |  |
| BELT WIDTH         |  |
| # OF SPACES        |  |
| EDGE FINISH        |  |
| MATERIAL           |  |
| NOTES:             |  |
|                    |  |
|                    |  |
|                    |  |

**NOTES:**

1. THIS DRAWING IS INTENDED SOLELY FOR LAYOUT PURPOSES. IT IS THE RESPONSIBILITY OF THE CUSTOMER TO RELAY ANY IMPORTANT INFORMATION REGARDING ANY AND ALL DESIGN FEATURES OF DESIRED BELT.
2. WHEN COUNTING THE NUMBER OF STRANDS IN (1)FOOT OF BELTING, BE SURE THAT THE BELT IS UNDER TENSION IN ORDER TO GATHER AN ACCURATE READING.
3. PLEASE CHECK THAT ALL SPACES ARE OF EQUAL SIZE. IF SIZES ARE DIFFERENT PLEASE SPECIFY IN THE "BELT SPECIFICATION CHART".

|   |  |   |         |         |
|---|--|---|---------|---------|
| <b>NOTICE:</b><br>THIS DRAWING IS THE PROPERTY OF THE WIRE MESH BELT COMPANY AND MAY NOT BE COPIED OR REPRODUCED IN ANY FORM, OR USED FOR MANUFACTURING PURPOSES OF ANY KIND WITHOUT THE EXPRESSED WRITTEN CONSENT OF THE WIRE MESH BELT COMPANY. | CUSTOMER INFORMATION   | <a href="http://www.qualitywiremesh.com">www.qualitywiremesh.com</a><br><a href="mailto:janeliu@qualitywiremesh.com">janeliu@qualitywiremesh.com</a><br><a href="https://www.whatsapp.com/channel/0029915831931141">whatsapp/WeChat : +86-15831931141</a> |         |         |
|   | P.O. #   |   |         |         |
| <br><b>ALL DIMENSIONS ARE INCHES UNLESS OTHERWISE SPECIFIED</b>  | W.O.#  | TITLE<br>FLAT FLEX BELTING  |         |         |
|   | <b>TOLERANCE UNLESS OTHERWISE SPECIFIED</b><br>DECIMAL .X ±.03<br>.XX ±.015<br>.XXX ±.005<br>.XXXX ±.0005<br>FRACTIONAL ± 1/16<br>ANGULAR ± 1/2° |   | REV     | SCALE   |
| DATE  |  | 11/03/03  | DRAWING | FFX-001 |
| DRAWN BY  |  | MP  |         |         |
|   |  |   | 0       | N.T.S.  |




**FOR REFERENCE ONLY**

\*NO MESH OVERLAY\*

\*STRAIGHT RUNNING BELT\*

\*ALL MATERIALS ARE 304 STAINLESS STEEL UNLESS OTHERWISE SPECIFIED\*

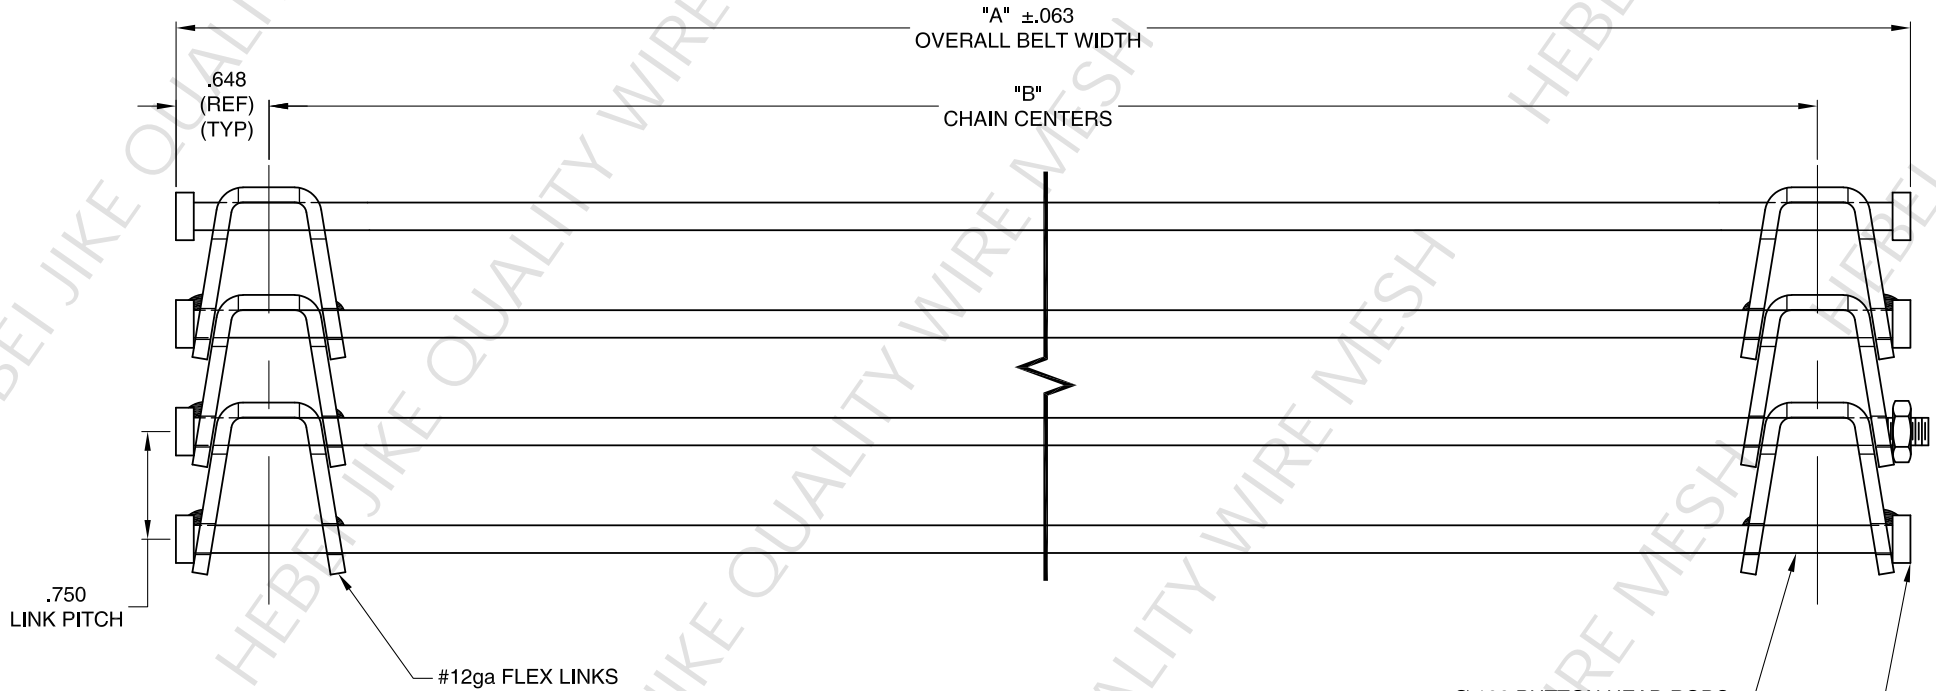

Ø.192 BUTTON HEAD RODS

TYPICAL BUTTONHEAD ON BOTH ENDS OF ALL RODS EXCEPT CONNECTING RODS.

**BELT SPECIFICATION**

| VARIABLES | DATA | MATERIAL |
|-----------|------|----------|
| "A"       |      |          |
| "B"       |      |          |
| MESH SPEC |      |          |

NOTES:

**NOTES:**


1. THIS DRAWING IS INTENDED SOLELY FOR LAYOUT PURPOSES. IT IS THE RESPONSIBILITY OF THE CUSTOMER TO RELAY ANY IMPORTANT INFORMATION REGARDING ANY AND ALL DESIGN FEATURES OF DESIRED BELT.

**NOTICE:**  
THIS DRAWING IS THE PROPERTY OF THE WIRE MESH BELT COMPANY AND MAY NOT BE COPIED OR REPRODUCED IN ANY FORM OR USED FOR MANUFACTURING PURPOSES OF ANY KIND WITHOUT THE EXPRESSED WRITTEN CONSENT OF THE WIRE MESH BELT COMPANY.

CUSTOMER INFORMATION  
P.O. #  
W.O.#  
QUOTE#

[www.qualitywiremesh.com](http://www.qualitywiremesh.com)  
[janeliu@qualitywiremesh.com](mailto:janeliu@qualitywiremesh.com)  
 whatsapp/WeChat : +86-15831931141

|   |     |        |
|---|-----|--------|
| TITLE   | REV | SCALE  |
| 3/4" x 12ga FLEX LINK BELT<br>2 ROWS-STRAIGHT RUNNING | 0   | N.T.S. |



**TOLERANCE UNLESS OTHERWISE SPECIFIED**

|         |       |        |            |        |
|---------|-------|--------|------------|--------|
| DECIMAL | .X    | ±.03   | FRACTIONAL | ± 1/16 |
|         | .XX   | ±.015  |            |        |
|         | .XXX  | ±.005  | ANGULAR    | ± 1/2° |
|         | .XXXX | ±.0005 |            |        |

|          |          |             |
|----------|----------|-------------|
| DATE     | 09/23/03 | DRAWING     |
| DRAWN BY | MP       | FL1275-2RNM |


PLEASE CIRCLE CRITICAL DIMENSION

"A" "B"

**FOR REFERENCE ONLY**

**\*STRAIGHT RUNNING BELT\***

**\*ALL MATERIALS ARE 304 STAINLESS STEEL UNLESS OTHERWISE SPECIFIED\***

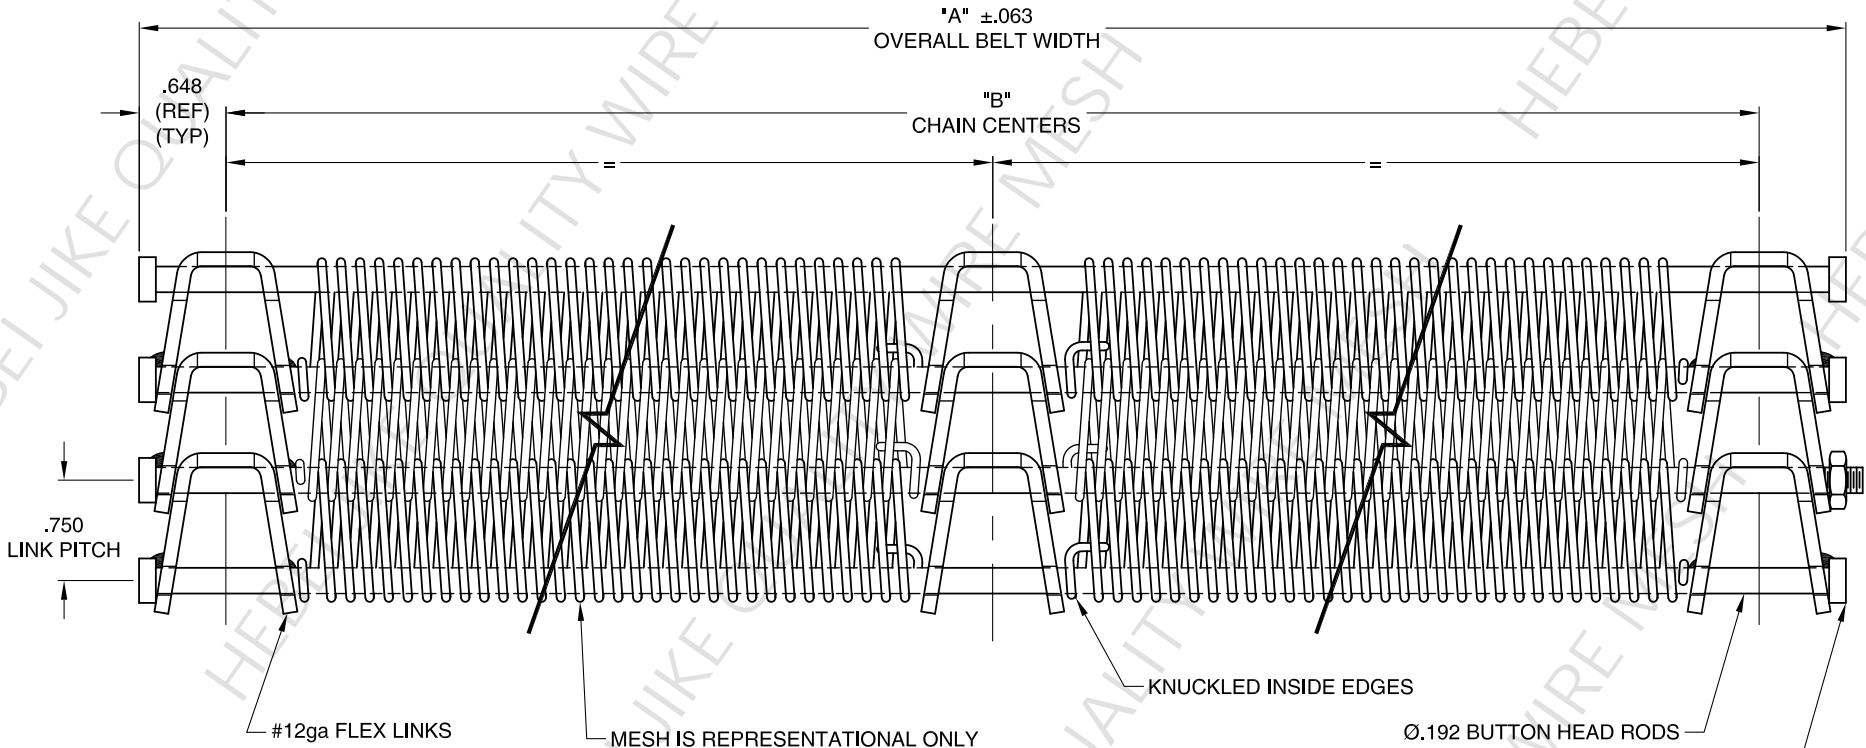


**BELT SPECIFICATION**

| VARIABLES                        | DATA | MATERIAL |
|----------------------------------|------|----------|
| "A"                              |      |          |
| "B"                              |      |          |
| MESH SPEC                        |      |          |
| NOTES:                           |      |          |
| PLEASE CIRCLE CRITICAL DIMENSION |      |          |
| "A"                              | "B"  |          |

**NOTES:**

1. THIS DRAWING IS INTENDED SOLELY FOR LAYOUT PURPOSES. IT IS THE RESPONSIBILITY OF THE CUSTOMER TO RELAY ANY IMPORTANT INFORMATION REGARDING ANY AND ALL DESIGN FEATURES OF DESIRED BELT.

**NOTICE:**  
THIS DRAWING IS THE PROPERTY OF THE WIRE MESH BELT COMPANY AND MAY NOT BE COPIED OR REPRODUCED IN ANY FORM OR USED FOR MANUFACTURING PURPOSES OF ANY KIND WITHOUT THE EXPRESSED WRITTEN CONSENT OF THE WIRE MESH BELT COMPANY.



ALL DIMENSIONS ARE INCHES UNLESS OTHERWISE SPECIFIED


|  |                                     |
|--|-------------------------------------|
| CUSTOMER INFORMATION                                       |                                     |
| P.O. #   |                                     |
| W.O.#  | QUOTE#                              |
| <b>TOLERANCE UNLESS OTHERWISE SPECIFIED</b>                |                                     |
| DECIMAL .X ±.03<br>.XX ±.015<br>.XXX ±.005<br>.XXXX ±.0005 | FRACTIONAL ± 1/16<br>ANGULAR ± 1/2° |

|   |          |           |
|---|----------|-----------|
| <a href="http://www.qualitywiremesh.com">www.qualitywiremesh.com</a><br><a href="mailto:janeliu@qualitywiremesh.com">janeliu@qualitywiremesh.com</a><br>whatsapp/WeChat : +86-15831931141 |          |           |
| TITLE   | REV      | SCALE     |
| 3/4" x 12ga FLEX LINK BELT<br>3 ROWS-STRAIGHT RUNNING   | 0        | N.T.S.    |
| DATE  | 06/17/03 | DRAWING   |
| DRAWN BY  | MP       | FL1275-3R |

**FOR REFERENCE ONLY**

\*RADIAL / STRAIGHT BELT\*  
(INSIDE RADIUS = 2.2 x OVERALL BELT WIDTH)

\*ALL MATERIALS ARE 304 STAINLESS STEEL UNLESS OTHERWISE SPECIFIED\*

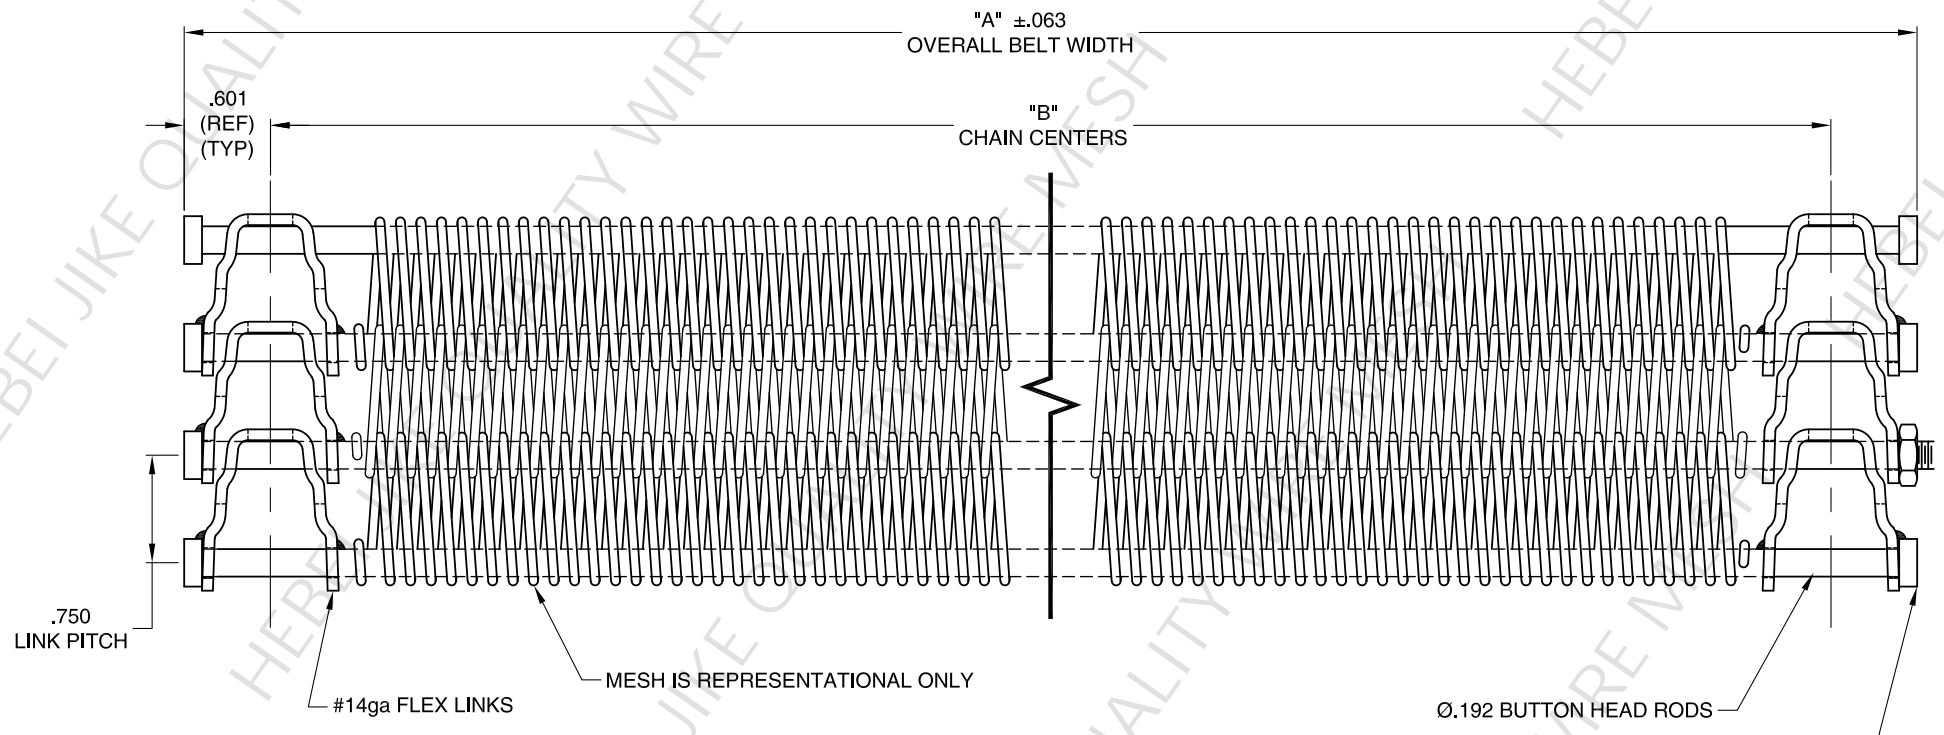

TYPICAL BUTTONHEAD ON BOTH ENDS OF ALL RODS EXCEPT CONNECTING RODS.

| BELT SPECIFICATION               |      |          |
|----------------------------------|------|----------|
| VARIABLES                        | DATA | MATERIAL |
| "A"                              |      |          |
| "B"                              |      |          |
| MESH SPEC                        |      |          |
| NOTES:                           |      |          |
|                                  |      |          |
|                                  |      |          |
|                                  |      |          |
| PLEASE CIRCLE CRITICAL DIMENSION |      |          |
| "A"                              | "B"  |          |

**NOTES:**

1. THIS DRAWING IS INTENDED SOLELY FOR LAYOUT PURPOSES. IT IS THE RESPONSIBILITY OF THE CUSTOMER TO RELAY ANY IMPORTANT INFORMATION REGARDING ANY AND ALL DESIGN FEATURES OF DESIRED BELT.

|   |                              |   |  |       |        |
|---|------------------------------|---|--|-------|--------|
| <b>NOTICE:</b><br>THIS DRAWING IS THE PROPERTY OF THE WIRE MESH BELT COMPANY AND MAY NOT BE COPIED OR REPRODUCED IN ANY FORM, OR USED FOR MANUFACTURING PURPOSES OF ANY KIND WITHOUT THE EXPRESSED WRITTEN CONSENT OF THE WIRE MESH BELT COMPANY. | CUSTOMER INFORMATION         | <a href="http://www.qualitywiremesh.com">www.qualitywiremesh.com</a><br><a href="mailto:janeliu@qualitywiremesh.com">janeliu@qualitywiremesh.com</a><br>whatsapp/WeChat : +86-15831931141 |  |       |        |
|   | P.O. #                       | TITLE   | REV  | SCALE |        |
|   | W.O.#                        | QUOTE#  | 3/4" x 14ga FLEX LINK BELT<br>2 ROWS-RADIAL/STRAIGHT RUN | 0     | N.T.S. |
| <b>TOLERANCE UNLESS OTHERWISE SPECIFIED</b><br>DECIMAL .X ±.03<br>.XX ±.015<br>.XXX ±.005<br>.XXXX ±.0005<br>FRACTIONAL ± 1/16<br>ANGULAR ± 1/2"  | DATE 06/17/03<br>DRAWN BY MP |   | DRAWING FL1475-2R  |       |        |

ASSEMBLY NUMBER AFL01475-2R

NO

DATE

REVISION


BY

\*NO MESH OVERLAY\*

FOR REFERENCE ONLY

\*RADIAL / STRAIGHT BELT\*  
(INSIDE RADIUS = 2.2 x OVERALL BELT WIDTH)

\*ALL MATERIALS ARE 304 STAINLESS STEEL UNLESS OTHERWISE SPECIFIED\*

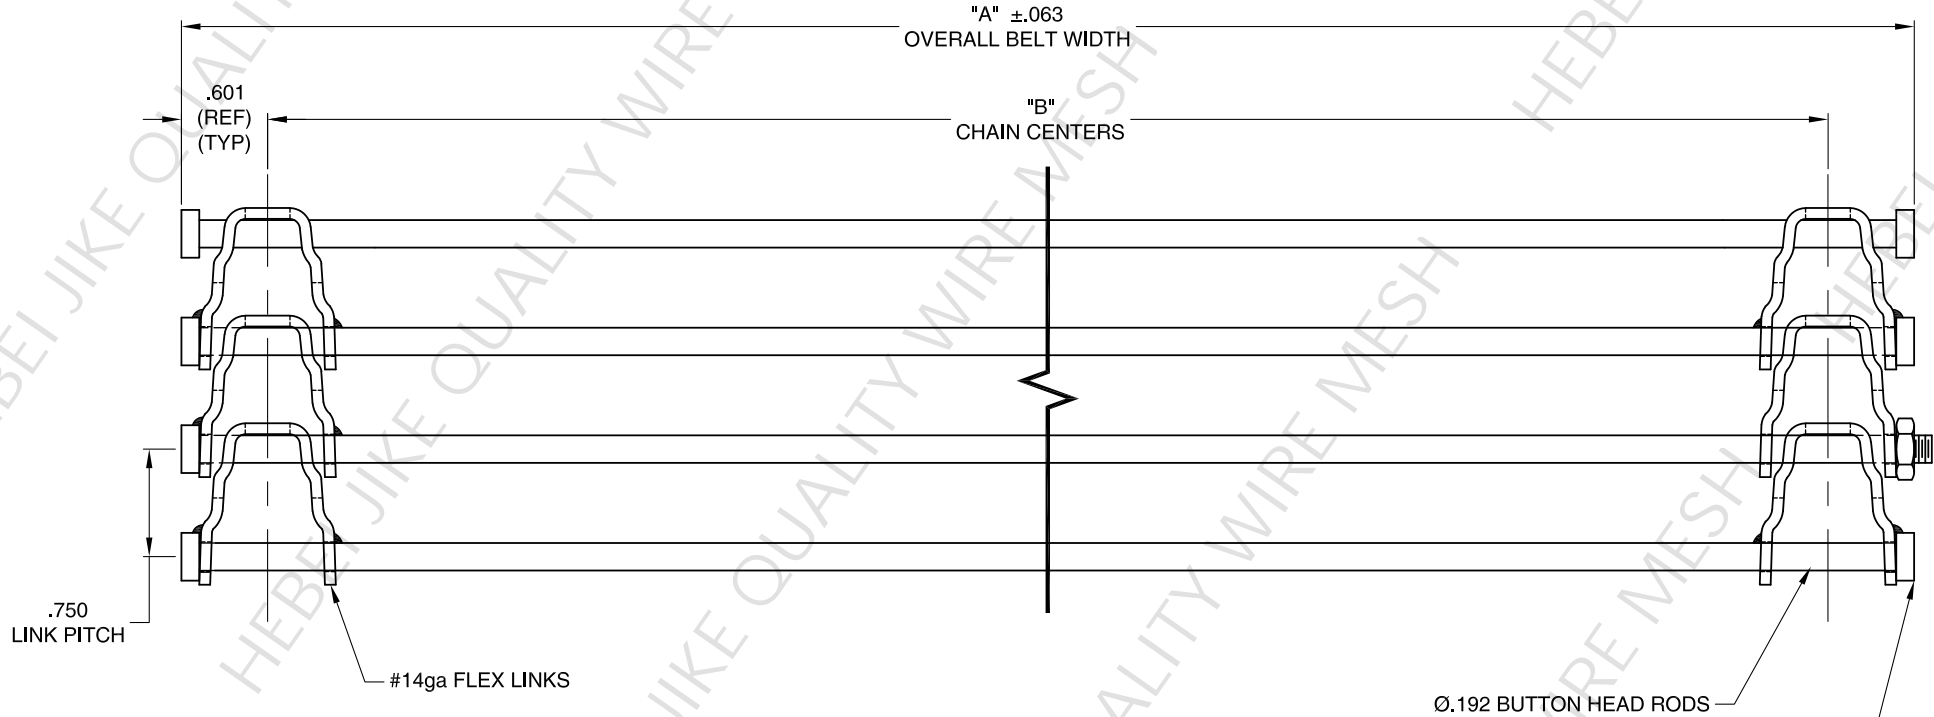

**BELT SPECIFICATION**


| VARIABLES                        | DATA | MATERIAL |
|----------------------------------|------|----------|
| "A"                              |      |          |
| "B"                              |      |          |
| MESH SPEC                        |      |          |
| NOTES:                           |      |          |
|                                  |      |          |
|                                  |      |          |
|                                  |      |          |
| PLEASE CIRCLE CRITICAL DIMENSION |      |          |
| "A"                              | "B"  |          |

Ø.192 BUTTON HEAD RODS  
TYPICAL BUTTONHEAD ON BOTH ENDS OF ALL RODS EXCEPT CONNECTING RODS.

**NOTES:**

1. THIS DRAWING IS INTENDED SOLELY FOR LAYOUT PURPOSES. IT IS THE RESPONSIBILITY OF THE CUSTOMER TO RELAY ANY IMPORTANT INFORMATION REGARDING ANY AND ALL DESIGN FEATURES OF DESIRED BELT.

**NOTICE:**  
THIS DRAWING IS THE PROPERTY OF THE WIRE MESH BELT COMPANY AND MAY NOT BE COPIED OR REPRODUCED IN ANY FORM OR USED FOR MANUFACTURING PURPOSES OF ANY KIND WITHOUT THE EXPRESSED WRITTEN CONSENT OF THE WIRE MESH BELT COMPANY.



ALL DIMENSIONS ARE INCHES UNLESS OTHERWISE SPECIFIED


|   |                   |
|---|-------------------|
| CUSTOMER INFORMATION                        |                   |
| P.O. #                                      |                   |
| W.O.#                                       | QUOTE#            |
| <b>TOLERANCE UNLESS OTHERWISE SPECIFIED</b> |                   |
| DECIMAL .X ±.03                             | FRACTIONAL ± 1/16 |
| .XX ±.015                                   |                   |
| .XXX ±.005                                  | ANGULAR ± 1/2°    |
| .XXXX ±.0005                                |                   |

|   |          |             |
|---|----------|-------------|
| <a href="http://www.qualitywiremesh.com">www.qualitywiremesh.com</a><br><a href="mailto:janeliu@qualitywiremesh.com">janeliu@qualitywiremesh.com</a><br>whatsapp/WeChat : +86-15831931141 |          |             |
| TITLE   | REV      | SCALE       |
| 3/4" x 14ga FLEX LINK BELT<br>2 ROWS-RADIAL/STRAIGHT RUN  | 0        | N.T.S.      |
| DATE  | 09/23/03 | DRAWING     |
| DRAWN BY  | MP       | FL1475-2RNM |

**FOR REFERENCE ONLY**

**\*STRAIGHT RUNNING BELT\***

**\*ALL MATERIALS ARE 304 STAINLESS STEEL UNLESS OTHERWISE SPECIFIED\***

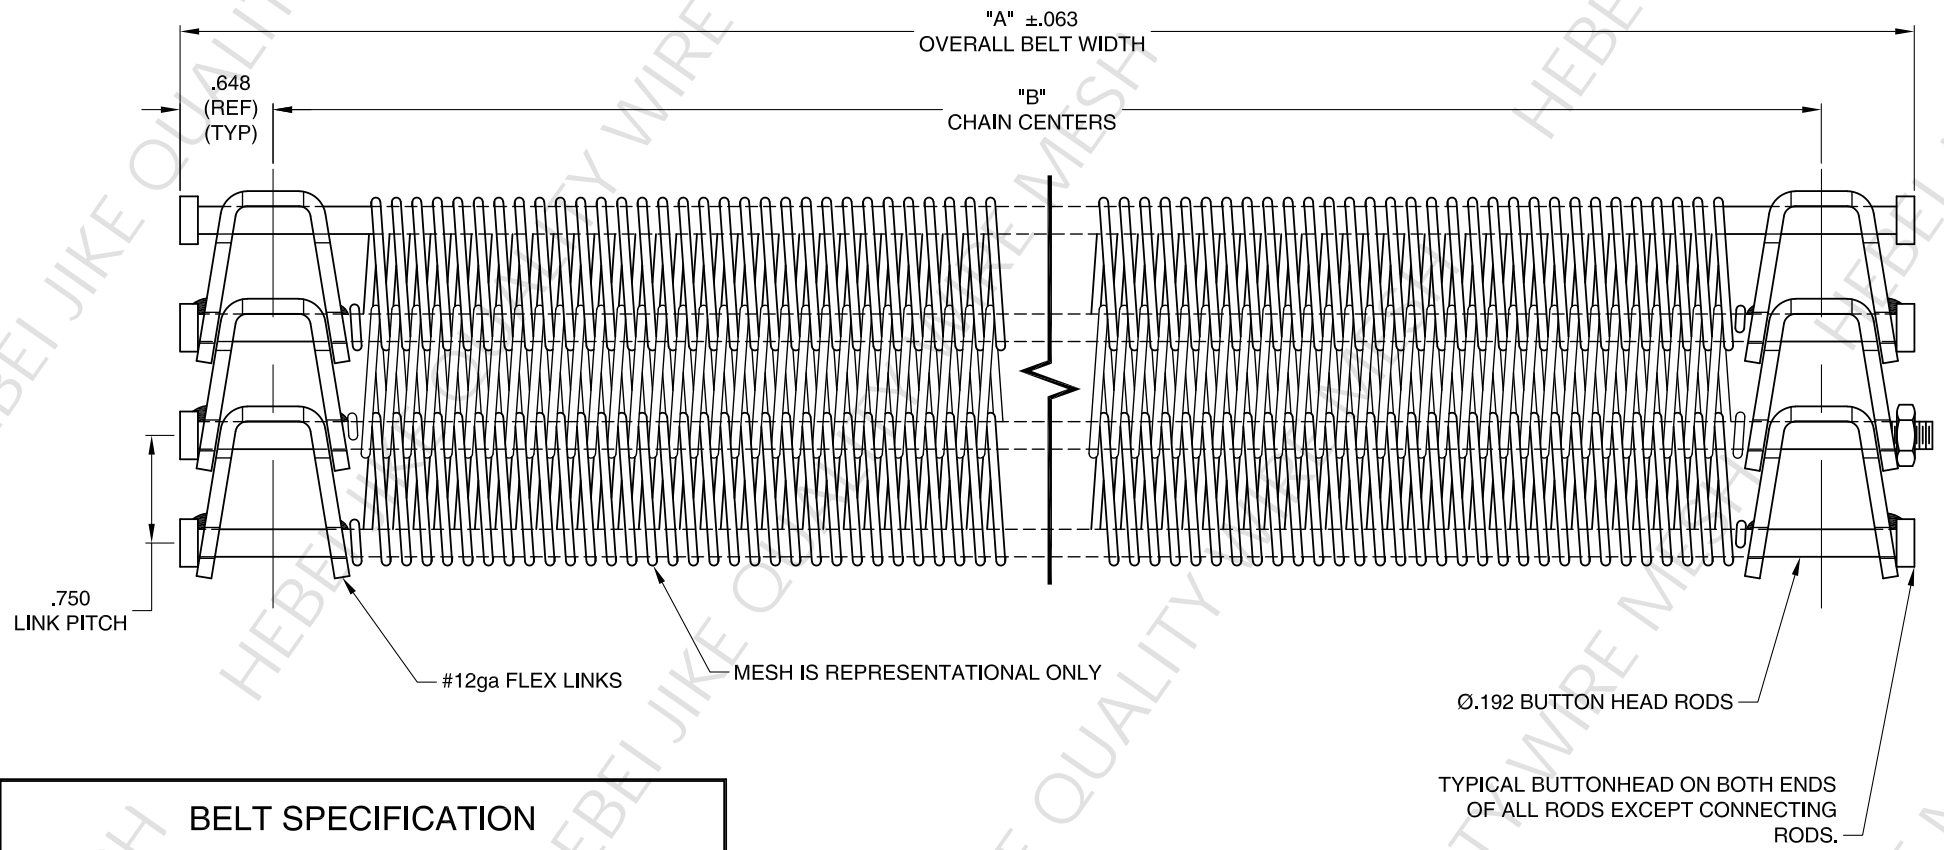

TYPICAL BUTTONHEAD ON BOTH ENDS OF ALL RODS EXCEPT CONNECTING RODS.

| BELT SPECIFICATION               |      |          |
|----------------------------------|------|----------|
| VARIABLES                        | DATA | MATERIAL |
| "A"                              |      |          |
| "B"                              |      |          |
| MESH SPEC                        |      |          |
| NOTES:                           |      |          |
|                                  |      |          |
|                                  |      |          |
|                                  |      |          |
|                                  |      |          |
| PLEASE CIRCLE CRITICAL DIMENSION |      |          |
| "A"                              | "B"  |          |


**NOTES:**

1. THIS DRAWING IS INTENDED SOLELY FOR LAYOUT PURPOSES. IT IS THE RESPONSIBILITY OF THE CUSTOMER TO RELAY ANY IMPORTANT INFORMATION REGARDING ANY AND ALL DESIGN FEATURES OF DESIRED BELT.

|  |  |  |   |           |        |
|--|--|--|---|-----------|--------|
| <p><b>NOTICE:</b><br/>THIS DRAWING IS THE PROPERTY OF THE WIRE MESH BELT COMPANY AND MAY NOT BE COPIED OR REPRODUCED IN ANY FORM OR USED FOR MANUFACTURING PURPOSES OF ANY KIND WITHOUT THE EXPRESSED WRITTEN CONSENT OF THE WIRE MESH BELT COMPANY.</p> | CUSTOMER INFORMATION   | <p><a href="http://www.qualitywiremesh.com">www.qualitywiremesh.com</a><br/> <a href="mailto:janeliu@qualitywiremesh.com">janeliu@qualitywiremesh.com</a><br/>                 whatsapp/WeChat : +86-15831931141</p> |   |           |        |
|  | P.O. #   | QUOTE#   | TITLE   | REV       | SCALE  |
| <p>W.O.#</p>   | <p>TOLERANCE UNLESS OTHERWISE SPECIFIED</p> <p>DECIMAL .X ±.03<br/>.XX ±.015<br/>.XXX ±.005<br/>.XXXX ±.0005</p> <p>FRACTIONAL ± 1/16<br/>ANGULAR ± 1/2"</p> |  | <p>3/4" x 12ga FLEX LINK BELT<br/>2 ROWS-STRAIGHT RUNNING</p> | 0         | N.T.S. |
| <p>ALL DIMENSIONS ARE INCHES UNLESS OTHERWISE SPECIFIED</p>  |  | DATE   | 06/17/03  | DRAWING   |        |
|  |  | DRAWN BY   | MP  | FL1275-2R |        |

**FOR REFERENCE ONLY**

\*RADIAL / STRAIGHT BELT\*  
 (INSIDE RADIUS = 2.2 x OVERALL BELT WIDTH)  
 \*ALL MATERIALS ARE 304 STAINLESS STEEL UNLESS OTHERWISE SPECIFIED\*

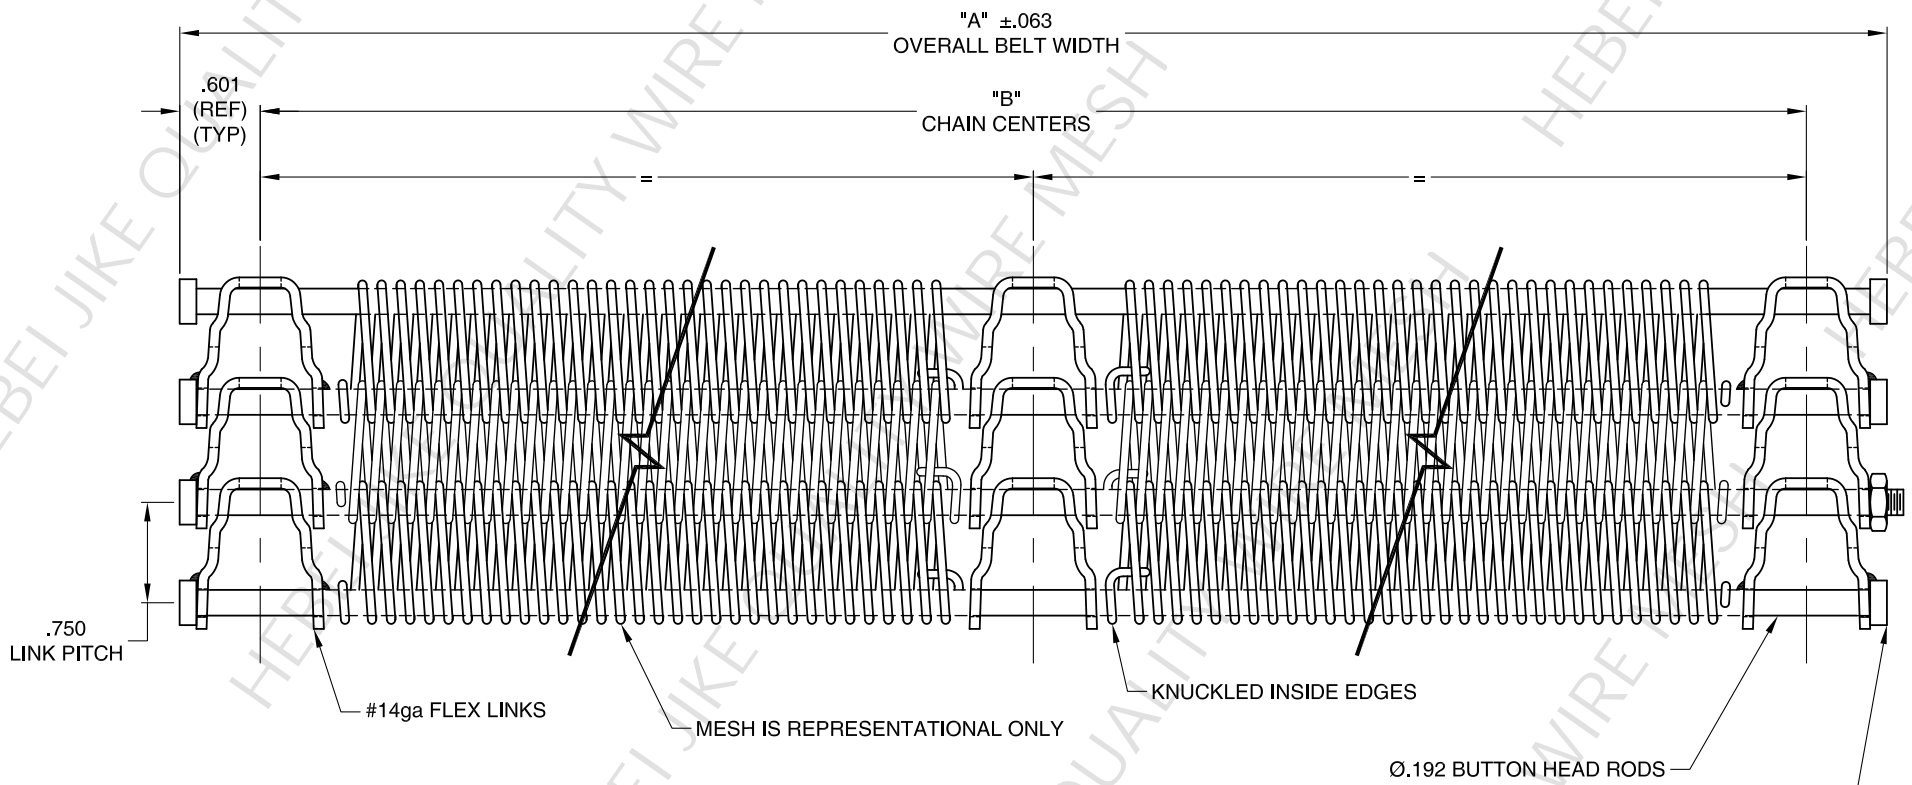

| BELT SPECIFICATION               |      |          |
|----------------------------------|------|----------|
| VARIABLES                        | DATA | MATERIAL |
| "A"                              |      |          |
| "B"                              |      |          |
| MESH SPEC                        |      |          |
| NOTES:                           |      |          |
|                                  |      |          |
|                                  |      |          |
|                                  |      |          |
|                                  |      |          |
| PLEASE CIRCLE CRITICAL DIMENSION |      |          |
| "A"                              | "B"  |          |

**NOTES:**  
 1. THIS DRAWING IS INTENDED SOLELY FOR LAYOUT PURPOSES. IT IS THE RESPONSIBILITY OF THE CUSTOMER TO RELAY ANY IMPORTANT INFORMATION REGARDING ANY AND ALL DESIGN FEATURES OF DESIRED BELT.

**NOTICE:**  
 THIS DRAWING IS THE PROPERTY OF THE WIRE MESH BELT COMPANY AND MAY NOT BE COPIED OR REPRODUCED IN ANY FORM, OR USED FOR MANUFACTURING PURPOSES OF ANY KIND WITHOUT THE EXPRESSED WRITTEN CONSENT OF THE WIRE MESH BELT COMPANY.


ALL DIMENSIONS ARE INCHES UNLESS OTHERWISE SPECIFIED

|  |                                     |
|--|-------------------------------------|
| CUSTOMER INFORMATION                                       |                                     |
| P.O. #   |                                     |
| W.O.#  | QUOTE#                              |
| TOLERANCE UNLESS OTHERWISE SPECIFIED                       |                                     |
| DECIMAL .X ±.03<br>.XX ±.015<br>.XXX ±.005<br>.XXXX ±.0005 | FRACTIONAL ± 1/16<br>ANGULAR ± 1/2° |

|   |          |           |
|---|----------|-----------|
| <a href="http://www.qualitywiremesh.com">www.qualitywiremesh.com</a><br><a href="mailto:janeliu@qualitywiremesh.com">janeliu@qualitywiremesh.com</a><br>whatsapp/WeChat : +86-15831931141 |          |           |
| TITLE   | REV      | SCALE     |
| 3/4" x 14ga FLEX LINK BELT<br>3 ROWS-RADIAL/STRAIGHT RUN  | 0        | N.T.S.    |
| DATE  | 06/17/03 | DRAWING   |
| DRAWN BY  | MP       | FL1475-3R |

|    |      |          |    |
|----|------|----------|----|
| NO | DATE | REVISION | BY |
|----|------|----------|----|

FINISHED LARGE SPIRAL TO ACCOMODATE 1/4" x 1 1/4" FLAT BAR

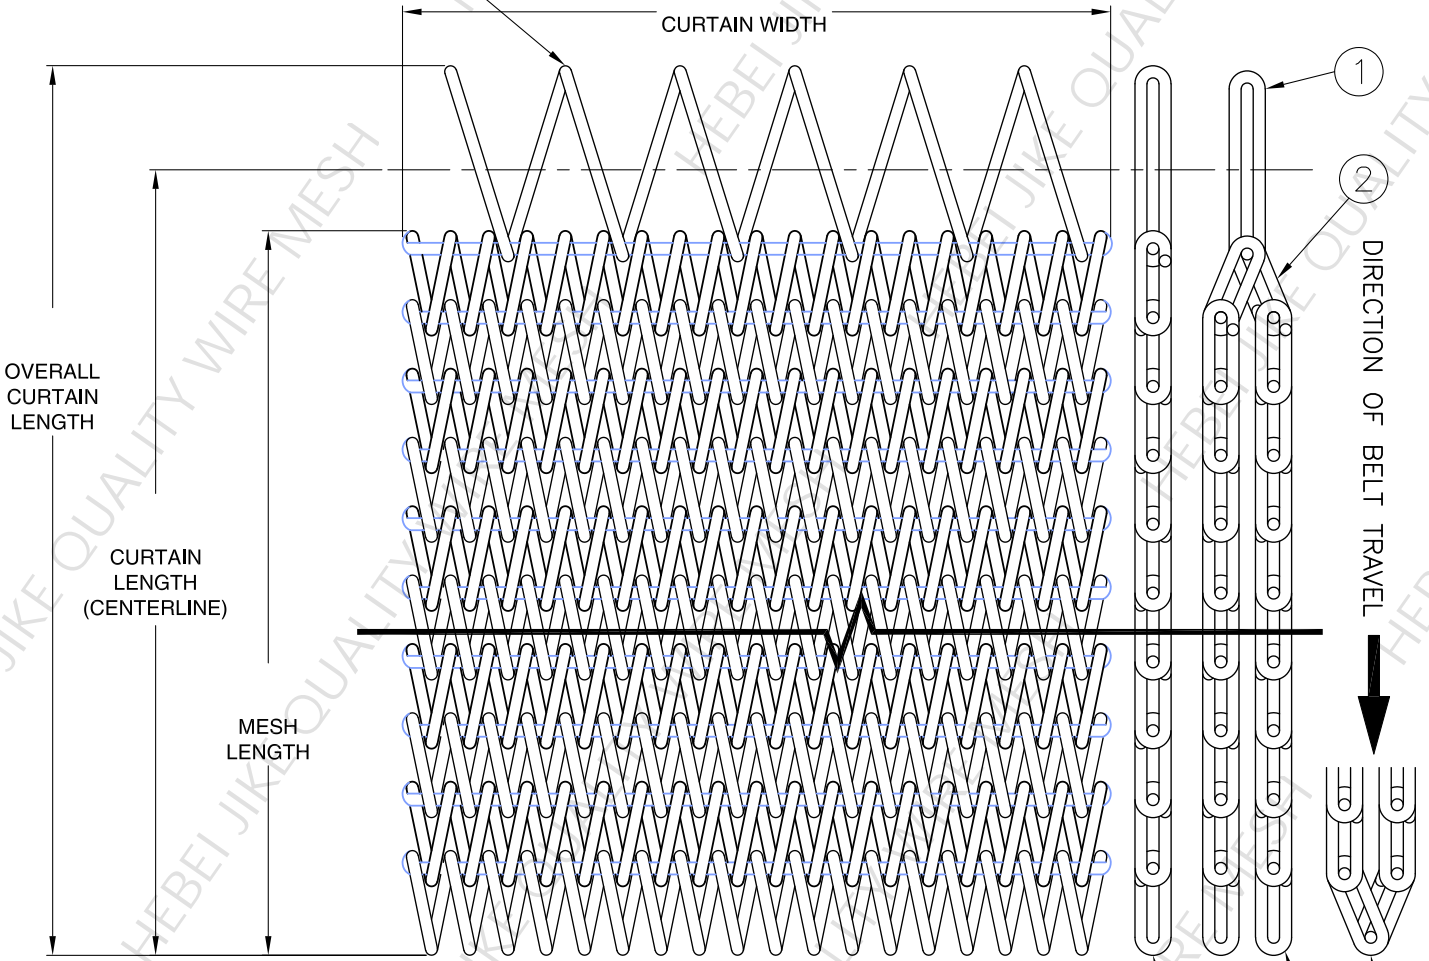

SINGLE PANEL MESH CURTAIN [STYLE # CTN-100]

DOUBLE PANEL (OPEN) MESH CURTAIN [STYLE # CTN-101]

DOUBLE PANEL (CLOSED) MESH CURTAIN [STYLE # CTN-102]

PLEASE FILL IN CURTAIN STYLE NUMBER IN SPACE PROVIDED.  
 CURTAIN STYLE # \_\_\_\_\_  
 PLEASE SPECIFY ALL REQUIRED INFORMATION IN CHART BELOW

| WIRE MESH CURTAIN SPECIFICATION |                          |          |     |
|---------------------------------|--------------------------|----------|-----|
| ITEM                            | CURTAIN MESH DESIGNATION | MATERIAL | QTY |
| 1                               | (LARGE SPIRAL)           |          |     |
| 2                               | (MESH)                   |          |     |

**NOTES:**

PLEASE NOTE THAT WMB STANDARDS FOR THIS STYLE OF CURTAIN IS AS FOLLOWS:  
 LARGE SPIRAL = B-12-8-12 (TO ACCOMODATE 1/4" x 1 1/4" FLAT BAR)  
 MESH WEAVE = B-36-20-12

THESE STANDARDS WILL BE UPHELD UNLESS OTHERWISE STATED IN SPECIFICATION CHART.

**FOR REFERENCE ONLY**

|  |  |  |      |          |         |
|--|--|--|------|----------|---------|
| <p><b>NOTICE:</b><br/>         THIS DRAWING IS THE PROPERTY OF THE WIRE MESH BELT COMPANY AND MAY NOT BE COPIED OR REPRODUCED IN ANY FORM, OR USED FOR MANUFACTURING PURPOSES OF ANY KIND WITHOUT THE EXPRESSED WRITTEN CONSENT OF THE WIRE MESH BELT COMPANY.</p> <p>ALL DIMENSIONS ARE INCHES UNLESS OTHERWISE SPECIFIED</p> | <p>CUSTOMER INFORMATION</p>  | <p><a href="http://www.qualitywiremesh.com">www.qualitywiremesh.com</a><br/> <a href="mailto:janeliu@qualitywiremesh.com">janeliu@qualitywiremesh.com</a><br/>           whatsapp/WeChat : +86-15831931141</p> |      |          |         |
|  | <p>P.O. #</p>  | TITLE  | REV  | SCALE    |         |
|  | <p>W.O.#</p>   | <p>WIRE MESH CURTAIN (FLAT BAR MOUNTED)</p>  | 0    | N.T.S.   |         |
|  | <p>TOLERANCE UNLESS OTHERWISE SPECIFIED</p> <p>DECIMAL .X ±.03<br/>         .XX ±.015<br/>         .XXX ±.005<br/>         .XXXX ±.0005</p> <p>FRACTIONAL ± 1/16<br/>         ANGULAR ± 1/2°</p> |  | DATE | 06/18/03 | DRAWING |
| <p>ACCOMPANYING DRAWING BSP-001</p>  |  | DRAWN BY   | MP   |          |         |

ASSEMBLY NUMBER AFL01475-2R

NO

DATE


REVISION

BY

**FOR REFERENCE ONLY**

\*RADIAL / STRAIGHT BELT\*  
(INSIDE RADIUS = 2.2 x OVERALL BELT WIDTH)

\*ALL MATERIALS ARE 304 STAINLESS STEEL UNLESS OTHERWISE SPECIFIED\*

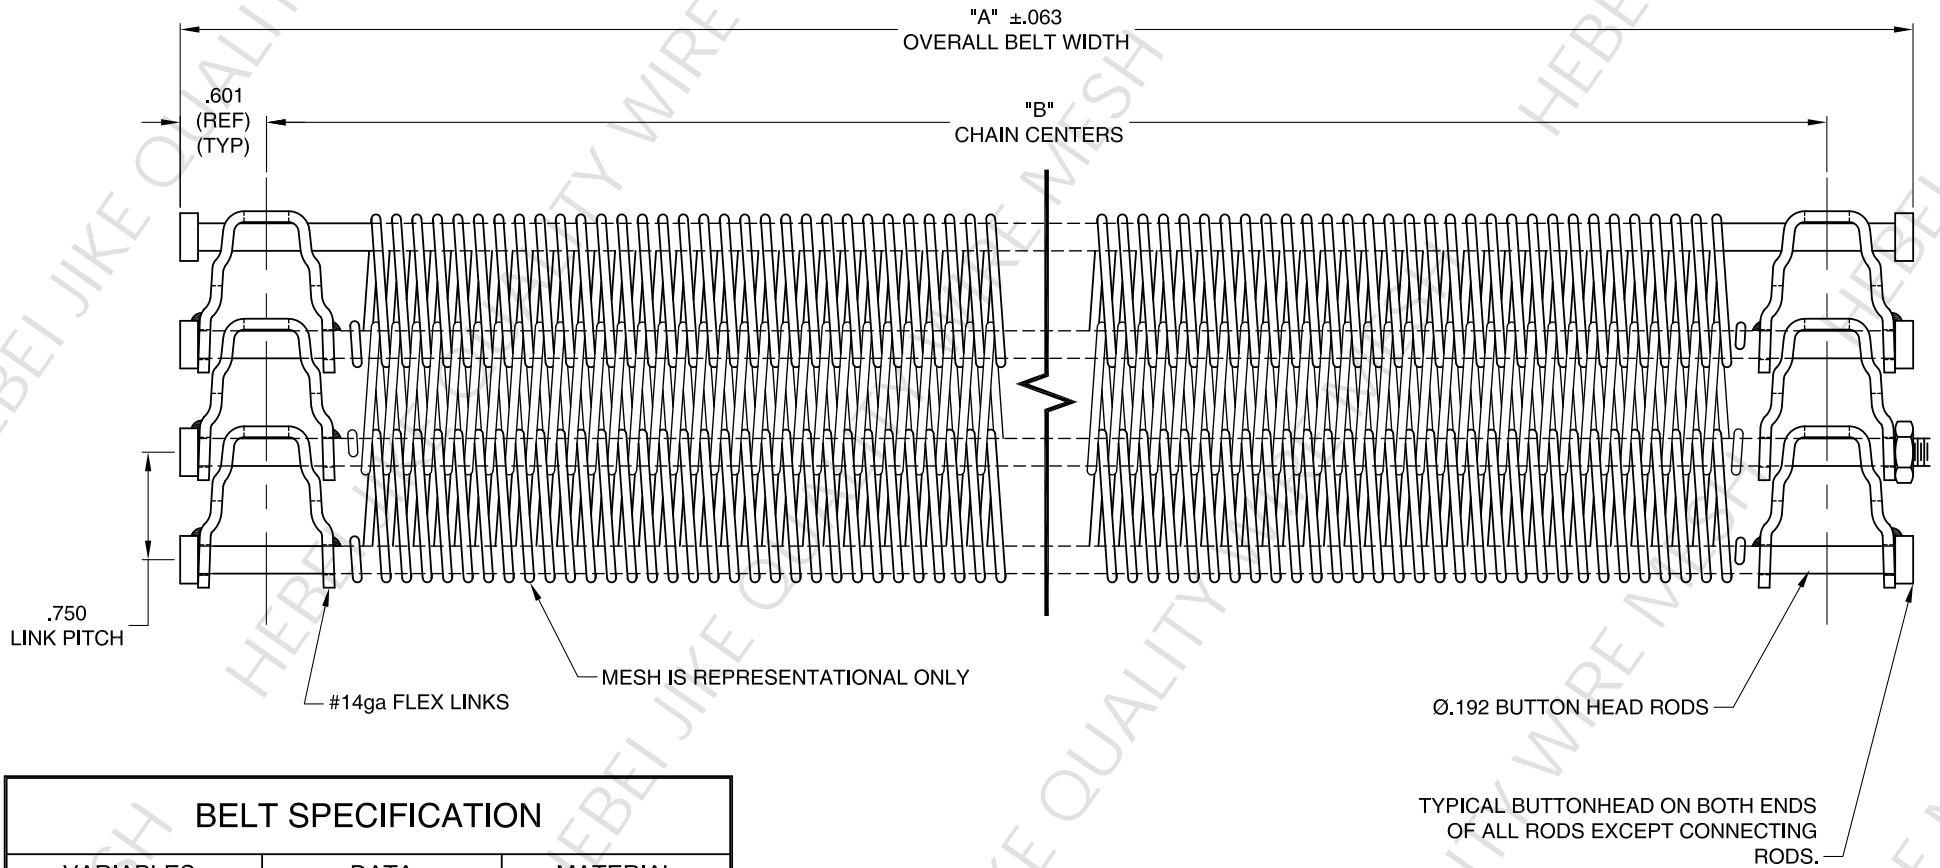

TYPICAL BUTTONHEAD ON BOTH ENDS OF ALL RODS EXCEPT CONNECTING RODS.


**BELT SPECIFICATION**

| VARIABLES                        | DATA | MATERIAL |
|----------------------------------|------|----------|
| "A"                              |      |          |
| "B"                              |      |          |
| MESH SPEC                        |      |          |
| NOTES:                           |      |          |
|                                  |      |          |
|                                  |      |          |
|                                  |      |          |
| PLEASE CIRCLE CRITICAL DIMENSION |      |          |
| "A"                              | "B"  |          |

**NOTES:**

1. THIS DRAWING IS INTENDED SOLELY FOR LAYOUT PURPOSES. IT IS THE RESPONSIBILITY OF THE CUSTOMER TO RELAY ANY IMPORTANT INFORMATION REGARDING ANY AND ALL DESIGN FEATURES OF DESIRED BELT.

**NOTICE:**  
THIS DRAWING IS THE PROPERTY OF THE WIRE MESH BELT COMPANY AND MAY NOT BE COPIED OR REPRODUCED IN ANY FORM OR USED FOR MANUFACTURING PURPOSES OF ANY KIND WITHOUT THE EXPRESSED WRITTEN CONSENT OF THE WIRE MESH BELT COMPANY.



ALL DIMENSIONS ARE INCHES UNLESS OTHERWISE SPECIFIED

|   |         |                   |        |
|---|---------|-------------------|--------|
| CUSTOMER INFORMATION                        |         |                   |        |
| P.O. #                                      |         | W.O.#             | QUOTE# |
| <b>TOLERANCE UNLESS OTHERWISE SPECIFIED</b> |         |                   |        |
| DECIMAL .X                                  | ± .03   | FRACTIONAL ± 1/16 |        |
| .XX   | ± .015  |                   |        |
| .XXX  | ± .005  | ANGULAR ± 1/2°    |        |
| .XXXX                                       | ± .0005 |                   |        |



|   |          |           |
|---|----------|-----------|
| <a href="http://www.qualitywiremesh.com">www.qualitywiremesh.com</a><br><a href="mailto:janeliu@qualitywiremesh.com">janeliu@qualitywiremesh.com</a><br>whatsapp/WeChat : +86-15831931141 |          |           |
| TITLE   | REV      | SCALE     |
| 3/4" x 14ga FLEX LINK BELT<br>2 ROWS-RADIAL/STRAIGHT RUN  | 0        | N.T.S.    |
| DATE  | 06/17/03 | DRAWING   |
| DRAWN BY  | MP       | FL1475-2R |




www.qualitywiremesh.com  
 janeliu@qualitywiremesh.com  
 whatsapp/WeChat : +86-15831931141

|                  |  |                                  |  |
|------------------|--|----------------------------------|--|
| COMPANY NAME:    |  | ATTENTION:                       |  |
| COMPANY ADDRESS: |  | SPECIAL REQUIREMENTS:            |  |
| EMAIL ADDRESS:   |  |                                  |  |
| TEL NO.:         |  |                                  |  |
| FAX NO.:         |  | (ex. PIN ROLL OR SPROCKET DRIVE) |  |

| BELT SPECIFICATION |          |
|--------------------|----------|
| BELT WIDTH         |          |
| BELT LENGTH        |          |
| BELT MATERIAL      |          |
| EDGE FINISH        |          |
| BELT STYLE         | B or BFS |
| SP                 |          |
| SD                 |          |
| CP                 |          |
| CD                 |          |
| *FW                |          |
| *FT                |          |

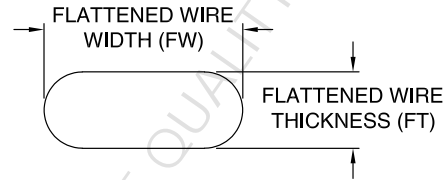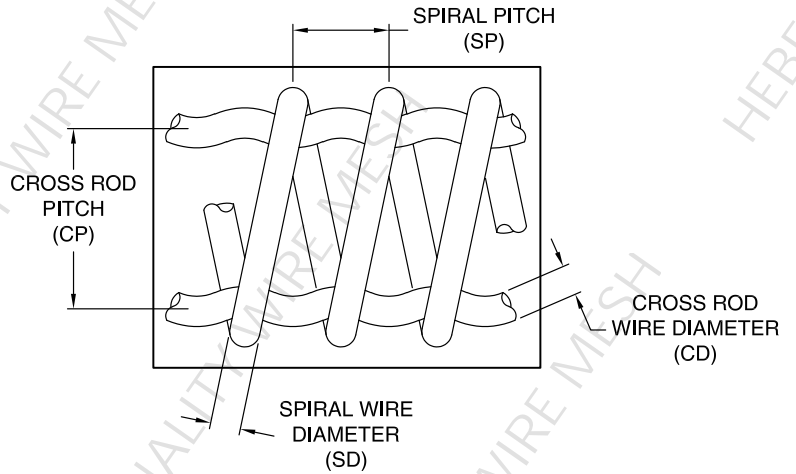

**SPIRAL & CROSS ROD PITCH MEASURING**

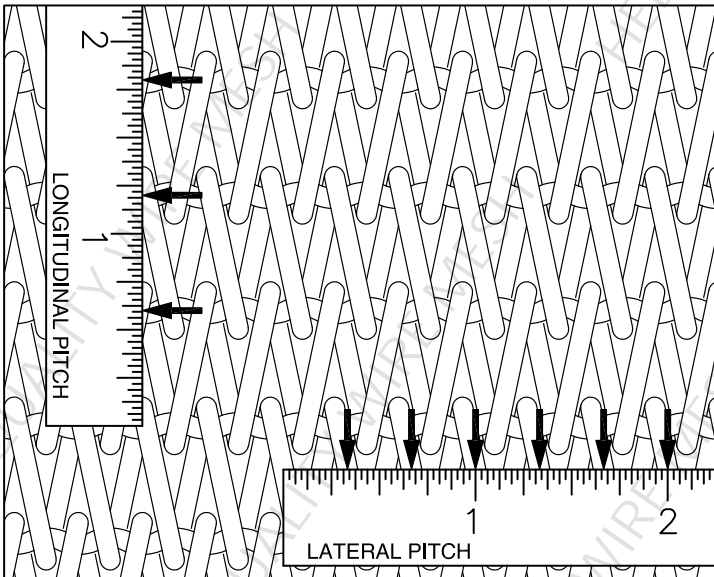

**MESH DESIGNATION**

ex. B-36-20-12

**LETTER DESIGNATION** = BELT STYLE, WHETHER BALANCE WEAVE (B) OR BALANCE WEAVE FLATTENED SPIRAL (BFS)

**1ST COUNT** = NUMBER OF LOOPS IN 12 INCHES OF BELT WIDTH = LATERAL PITCH

**2ND COUNT** = NUMBER OF CONNECTOR RODS IN 12 INCHES OF BELT LENGTH = LONGITUDINAL PITCH

**3RD COUNT** = WIRE GAUGE. IF 3RD COUNT CONSISTS OF (2) PAIRS OF NUMBERS, THE 1ST IS THE CONNECTOR WIRE GAUGE, THE 2ND IS THE SPIRAL WIRE GAUGE.