




## Vibrating Screen Wire Mesh With Hook For Crusher



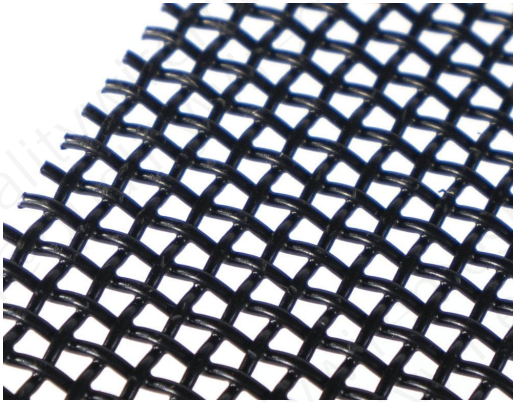


**Woven wire vibrating screen** is also called quarry screen mesh or stone crusher screen mesh. It is made of spring steel wire (high carbon steel wire, medium carbon steel wire, manganese steel wire and stainless steel wire). The high-quality raw materials make woven vibrating screen mesh have many features, such as high tensile, wear, temperature and weather resistance and so on. With so many features, the woven vibrating screen mesh is used on vibrating machines in screening and sizing all kinds of sand, gravel, coal, stone, rock and other materials in mining, quarry, aggregate production industries.

牌号 Grade	化学成分 % Chemical Composition		
	C	Si	Mn
45	0.42-0.50	0.17-0.37	0.50-0.80
50	0.47-0.55		
55	0.52-0.60		
60	0.57-0.65		
65	0.62-0.70		
70	0.67-0.75		
65Mn	0.62-0.70		0.90-1.20
72A	0.70-0.75	0.15-0.35	0.30-0.60



HEBEI JIKE TRADE CO.,LTD  
ZHONGKE INDUSTRIAL PRODUCTS CO.,LTD  
ADD:BAONENG CENTER,SHIJIAZHUANG,HEBEI,CHINA 050800  
TEL/WECHAT/WHATSAPP:+86-15831931141 +86-19930751141  
Email: [janeliu@qualitywiremesh.com](mailto:janeliu@qualitywiremesh.com) Web: [www.qualitywiremesh.com](http://www.qualitywiremesh.com)

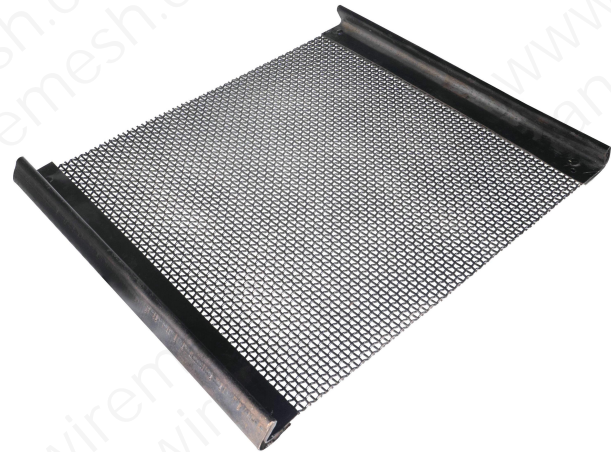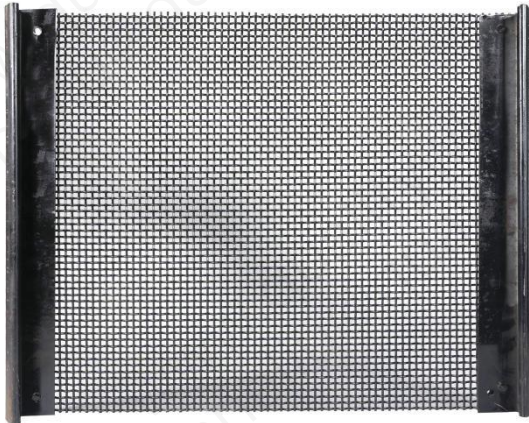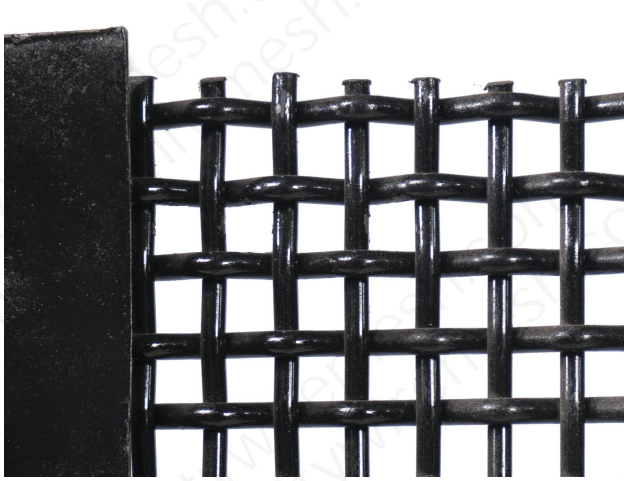

## Features

- High strength, not easily deformed.
- Wear resistance, corrosion resistance, and rust resistance.
- High temperature is resistant.
- High-quality ductility and toughness.
- Mesh uniform.
- Long service life.
- The opening of the cloth is neat and precise.
- Various materials for choice.
- Beautiful surface.
- Acid and alkali resistance.



HEBEI JIKE TRADE CO.,LTD  
ZHONGKE INDUSTRIAL PRODUCTS CO.,LTD  
ADD:BAONENG CENTER,SHIJIAZHUANG,HEBEI,CHINA 050800  
TEL/WECHAT/WHATSAPP:+86-15831931141 +86-19930751141  
Email: [janeliu@qualitywiremesh.com](mailto:janeliu@qualitywiremesh.com) Web: [www.qualitywiremesh.com](http://www.qualitywiremesh.com)

## Detail Description

Material: High tensile spring steel, manganese steel, High carbon and medium carbon steel wire, black wire, and stainless steel wire.

Wire diameter: 0.71–14 mm.

Opening size: 1–110 mm.

Surface treatment: Galvanized before weave and galvanized after weave, painted.


Hole type: Square mesh, rectangular mesh.

Hook Type: C or U hook for 30° - 180°


Weaving type: Double crimped, intermediate crimped, flat top crimped, lock crimped.

Edge preparation: Plain, bent, reinforced shroud, welded shroud, bolt shroud.

Woven Type

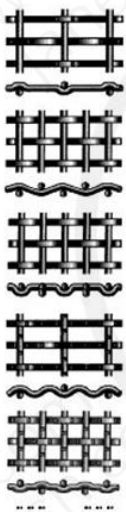

Hook Type

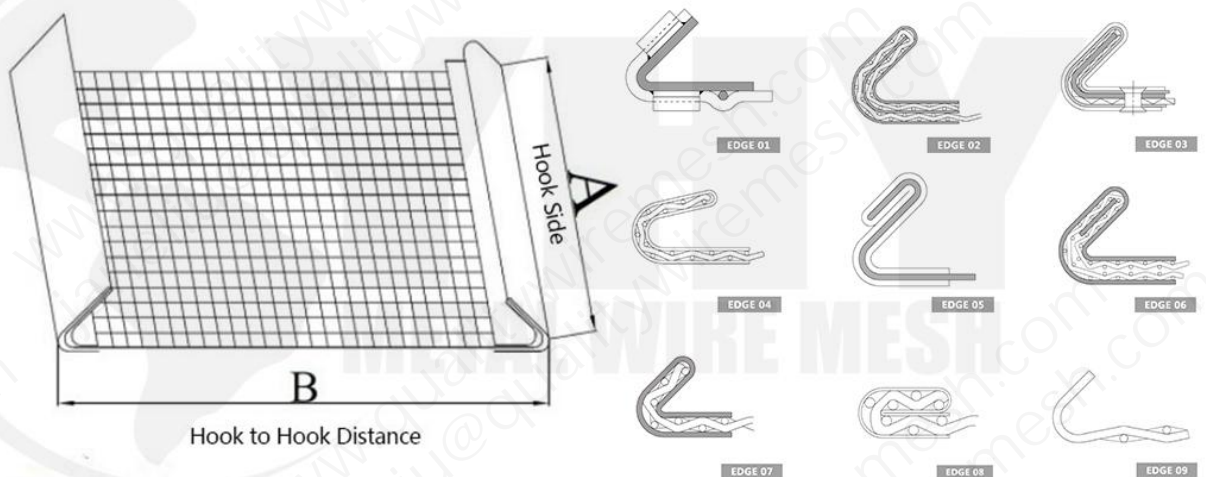



HEBEI JIKE TRADE CO.,LTD  
 ZHONGKE INDUSTRIAL PRODUCTS CO.,LTD  
 ADD:BAONENG CENTER,SHIJIAZHUANG,HEBEI,CHINA 050800  
 TEL/WECHAT/WHATSAPP:+86-15831931141 +86-19930751141  
 Email: [janeliu@qualitywiremesh.com](mailto:janeliu@qualitywiremesh.com) Web: [www.qualitywiremesh.com](http://www.qualitywiremesh.com)

## Specifications

Diameter (mm)	Opening (mm)	Mesh	Weight ( kg/m <sup>2</sup> )	Length (M)	Weight (Kg)
12	60	0.35	25.9	30	777
10	60	0.36	18.5	30	555
9	60	0.36	14.9	30	446
8	60	0.37	12.19	30	365
7	50	0.44	11.13	30	334
6	50	0.45	8.32	30	250
5	40	0.56	7.2	30	215
4	40	0.58	4.73	30	142
4	30	0.75	6.07	30	182
4	25	0.87	7.1	30	213
3.2	25	0.87	4.7	30	141
3.2	20	1.1	5.63	30	169
2.6	20	1.12	3.87	30	116
2.6	18	1.23	4.23	30	127
2.6	15	1.44	5.77	30	173
2	15	1.49	3.06	30	92
2	12	1.8	3.67	30	110
2	10	2.12	4.23	30	127
2	8	2.54	5.17	30	155
1.8	7	3	4.96	30	149
1.8	6	3.25	5.36	30	161
1.6	7	3	3.9	30	117
1.6	6	3.35	4.37	30	131
1.6	5	3.85	5	30	150
1.6	4	4.5	5.87	30	176
1.6	3	5.5	7.17	30	215
1.4	6	3.5	3.5	30	105
1.4	5	4	4	30	120
1.4	4	4.7	4.67	30	140
1.2	8	2.7	1.97	30	59
1.2	7	3.1	2.26	30	68
1.2	6	3.5	2.57	30	77



HEBEI JIKE TRADE CO.,LTD  
ZHONGKE INDUSTRIAL PRODUCTS CO.,LTD  
ADD:BAONENG CENTER,SHIJIAZHUANG,HEBEI,CHINA 050800  
TEL/WECHAT/WHATSAPP:+86-15831931141 +86-19930751141  
Email: [janeliu@qualitywiremesh.com](mailto:janeliu@qualitywiremesh.com) Web: [www.qualitywiremesh.com](http://www.qualitywiremesh.com)

## Application





HEBEI JIKE TRADE CO.,LTD  
ZHONGKE INDUSTRIAL PRODUCTS CO.,LTD  
ADD:BAONENG CENTER,SHIJIAZHUANG,HEBEI,CHINA 050800  
TEL/WECHAT/WHATSAPP:+86-15831931141 +86-19930751141  
Email: [janeliu@qualitywiremesh.com](mailto:janeliu@qualitywiremesh.com) Web: [www.qualitywiremesh.com](http://www.qualitywiremesh.com)

## Packing

gging

